OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



FIG. 1

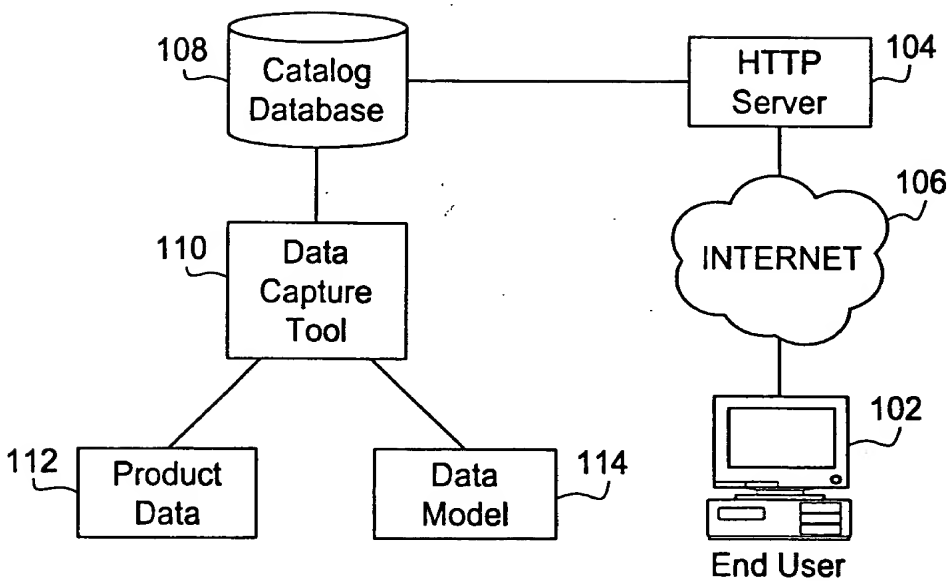

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



FIG. 2

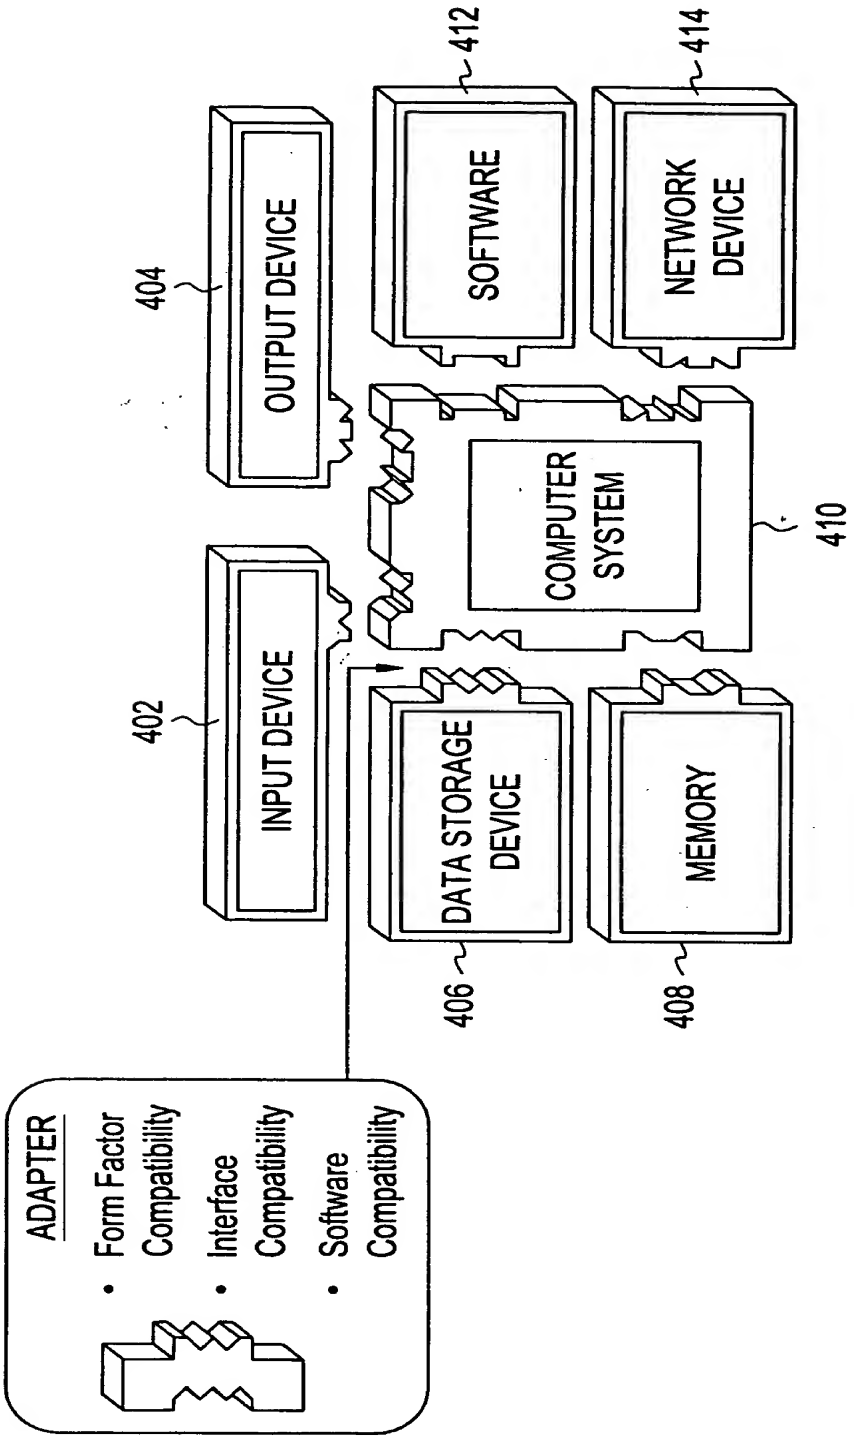

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



# FIG. 3-1

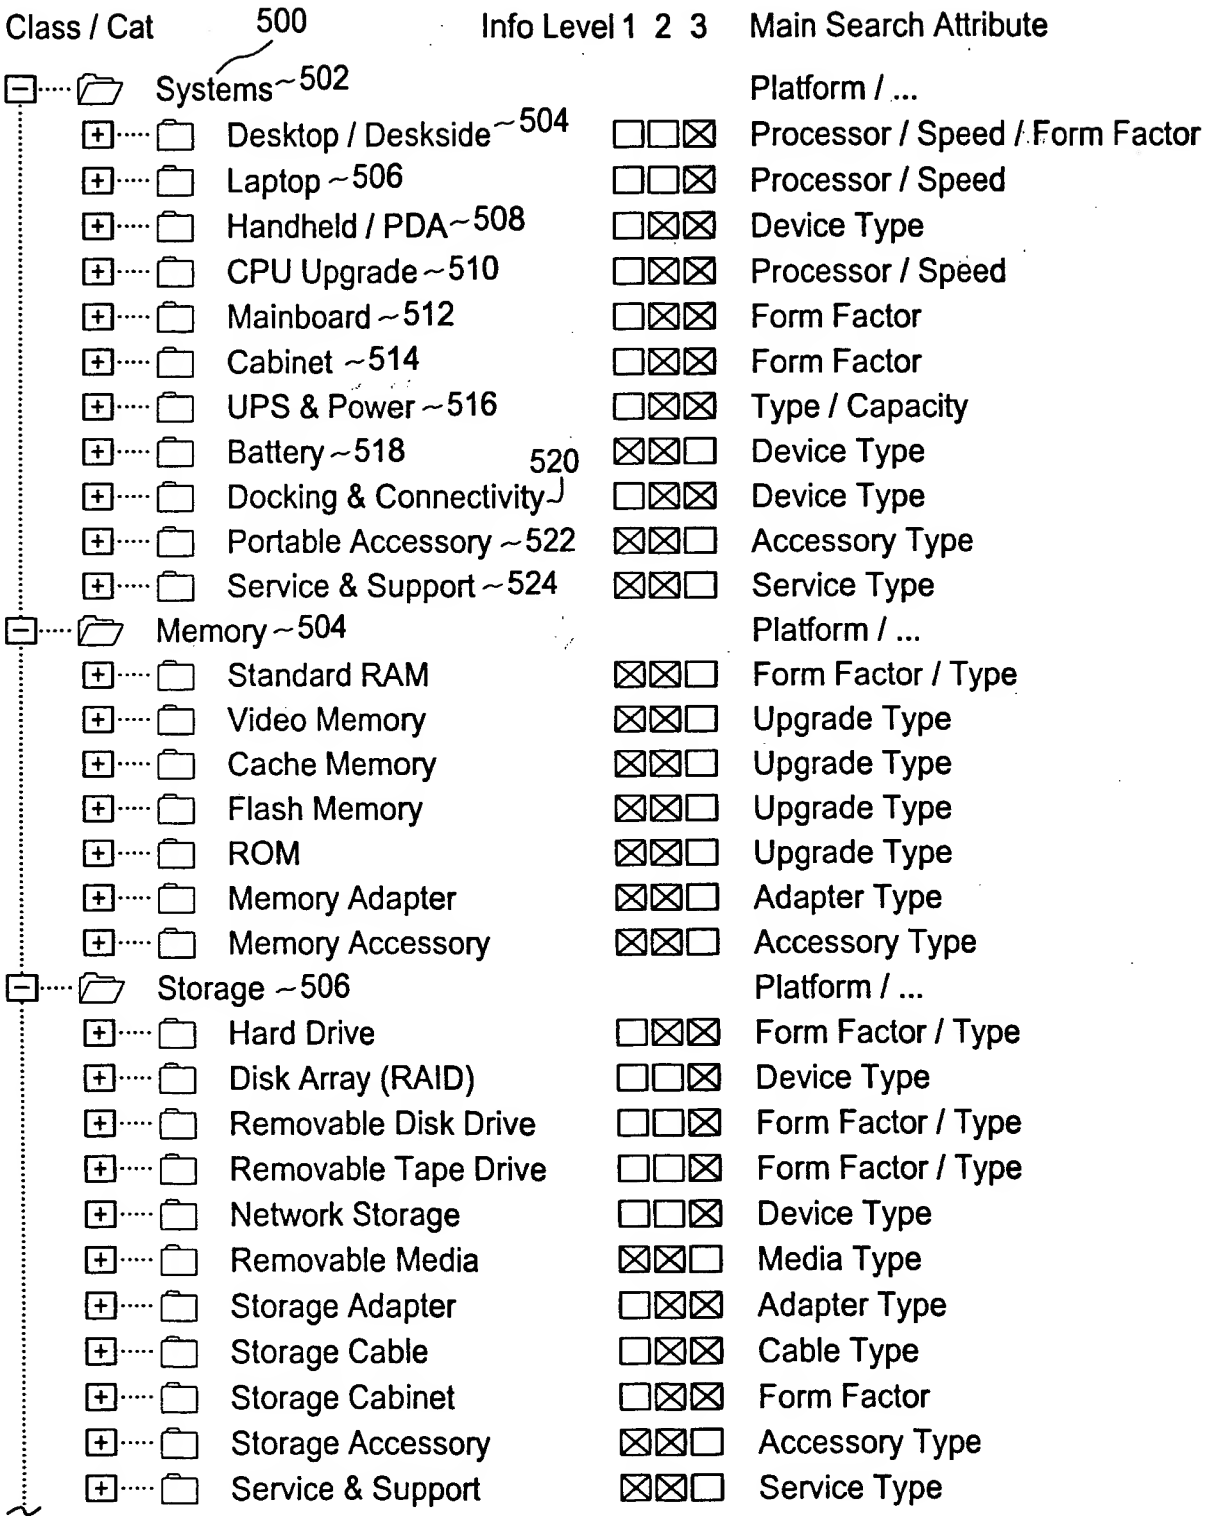

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



# FIG. 3-2

| Class / Cat | Info Level 1 2 3 | Main Search Attribute |
|---|---|---|
| Input ~508 | | Platform / ... |
| Key-Entry Device | ☐☒☒ | Type / Connection |
| Pointing Device | ☐☒☒ | Type / Connection |
| Game Controller | ☐☒☒ | Type / Connection |
| Scanner | ☐☒☒ | Device Type |
| Bar Code Reader | ☐☒☒ | Form Factor / Type |
| Audio Input | ☐☒☒ | Device Type |
| Video Input | ☐☒☒ | Form Factor / Type |
| Input Adapter | ☐☒☒ | Adapter Type |
| Input Cable | ☐☒☒ | CableType |
| Input Accessory | ☒☒☐ | Accessory Type |
| Service & Support | ☒☒☐ | Service Type |
| Output ~510 | | Platform / ... |
| Desktop Monitor | ☐☒☒ | Type / Size |
| Presentation Monitor | ☐☒☒ | Type / Size |
| Projector & Panel | ☐☒☒ | Form Factor / Type |
| Printer | ☐☒☒ | Type / Productivity |
| Audio | ☐☒☒ | Device Type |
| Video Adapter | ☐☒☒ | Type / Interface |
| Audio Adapter | ☐☒☒ | Type / Interface |
| Output Cable | ☐☒☒ | Cable Type |
| Printer Consumable | ☒☒☐ | Consumable Type |
| Output Accessory | ☒☒☐ | Accessory Type |
| Service & Support | ☒☒☐ | Service Type |
| Network ~512 | | Platform / ... |
| Modem | ☐☒☒ | Form Factor / Type |
| Communication | ☐☒☒ | Device Type |
| Access Point | ☐☒☒ | Device Type |
| Multiplexor | ☐☒☒ | Device Type |
| Repeater / Bridge | ☐☒☒ | Device Type |
| Hub / Switch | ☐☒☒ | Device Type |
| Router | ☐☒☒ | Device Type |

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



# FIG. 3-3

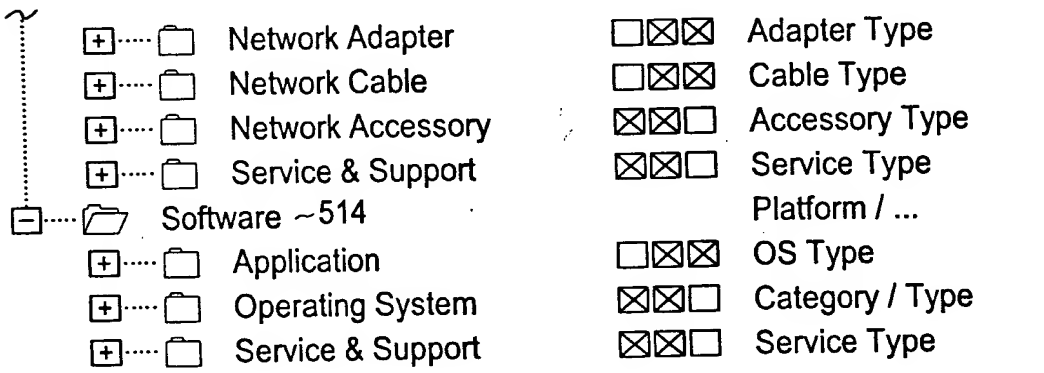

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



# FIG. 4-1

626 624 622

| Systems - Desktop / Deskside<br>Attribute | Priority | Srch. | Value List Name | Multi-Valued | Units List Name |
|---|---|---|---|---|---|
| **AA Desktop / Deskside** ~602 608<br>High (Medium) Priority Attributes **126** (62) | | | Search Attributes **42** ~622 | | |
| **Header (G00063)** | | 624 | | | |
| A00603 Compatibility | 1 | ☒ | Product Compatibility | ☒ | |
| A00604 Localization | 1 | ☒ | Product Localization | ☒ | |
| A00605 Country Kits | 1 | ☒ | Product Country Kit | ☒ | |
| A00600 Product Line | 1 | ☒ | | ☐ | |
| A00601 Model | 1 | ☒ | | ☐ | |
| A00630 Manufacturer 610 | 1 | ☒ | | ☐ | |
| **System (G00050) → Attribute Group** ~604 | | | | | |
| A00432 Type ~612 Attribute 606 | 1 | ☒ | General System Type | ☒ | |
| A00431 Designation ~614 | 1 | ☒ | General Product Designation | ☒ | |
| **Cabinet / Chassis (G00007)** | | | | | |
| A00031 Built-in-Devices | 2 | ☐ | Cabinet Built-in-Devices | ☒ | |
| A00030 Form Factor | 1 | ☒ | Cabinet Form Factor | ☐ | |
| **Processor (G00008)** ~616 | | | | | |
| A00036 Form Factor | 1 | ☒ | Component Form factor | ☐ | |
| A00037 Installed Qty | 1 | ☒ | Numeric Entry | ☐ | |
| A00038 Max Supported Qty | 1 | ☒ | Numeric Entry | ☐ | |
| A00039 Manufacturer | 1 | ☒ | Processor Manufacturer | ☐ | |
| A00041 Instruction Set | 2 | ☐ | Processor Instruction Set | ☐ | |
| A00042 Upgradability ~618 | 1 | ☒ | Component Upgradability | ☐ | |
| A00043 Math Coprocessor | 2 | ☐ | Component Form factor | ☐ | |
| A00044 Cache Level 1 Size | 2 | ☐ | Numeric Entry | ☐ | Data Size (Bytes) |
| A00045 Architecture Features ~622 | 2 | ☐ | Processor Features | ☒ | |
| A00040 Clock Speed ~620 | 1 | ☒ | Numeric Entry | ☐ | Frequency Units |
| A00035 Type | 1 | ☒ | Processor Type | ☐ | |

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



# FIG. 4-2

| | | | | | |
|---|---|---|---|---|---|
| **Mainboard (G00009)** | | | | | |
| A00050 Chipset Type | 2 | ☐ | Chipset Vendor / Type | ☐ | |
| A00051 BIOS Type | 2 | ☐ | Mainboard BIOS Vendor / Type | ☐ | |
| A00049 Data Bus Speed | 1 | ☒ | Bus Clock Speed | ☐ | Frequency Units |
| **Memory / Cache (G00046)** | | | | | |
| A00398 Form Factor | 2 | ☐ | Memory Form Factor | ☐ | |
| A00399 Technology | 1 | ☐ | Memory Technology | ☐ | |
| A00400 Installed Size | 1 | ☒ | Numeric Entry | ☐ | Data Size (Bytes) |
| A00401 Max Supported Size | 1 | ☒ | Numeric Entry | ☐ | Data Size (Bytes) |
| A00397 Type | 1 | ☐ | Memory Type | ☐ | |
| A00407 Upgrade Rule | 2 | ☐ | Upgrade Rule | ☐ | |
| **Memory / RAM (G00010)** | | | | | |
| A00053 Installed Size | 1 | ☒ | Numeric Entry | ☐ | Data Size (Bytes) |
| A00054 Soldered Size | 2 | ☐ | Numeric Entry | ☐ | Data Size (Bytes) |
| A00055 Max Supported Size | 1 | ☒ | Numeric Entry | ☐ | Data Size (Bytes) |
| A00056 Technology | 1 | ☒ | Memory Technology | ☐ | |
| A00057 Data Integrity Check | 2 | ☐ | Memory Error Correction | ☐ | |
| A00058 Features | 2 | ☐ | Memory Features | ☒ | |
| A00059 Supply Voltage | 2 | ☐ | Voltage | ☐ | Voltage Units |

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



FIG. 5

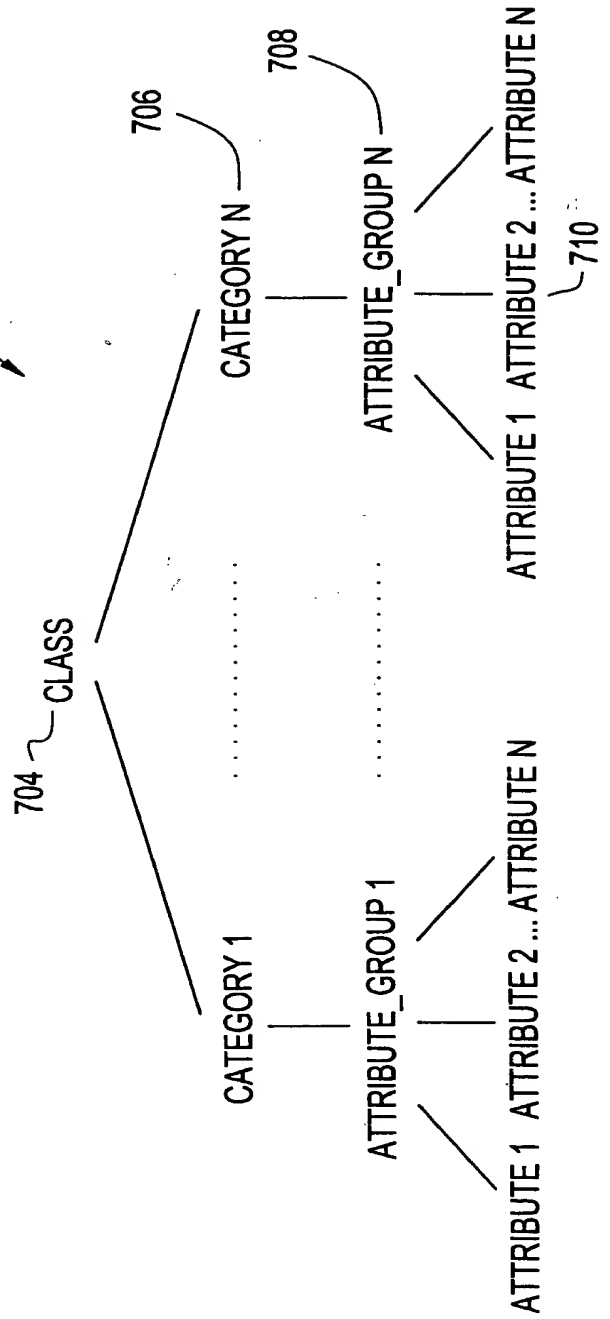

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



FIG. 6

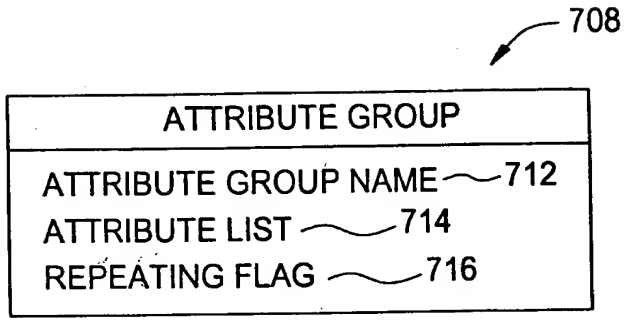


FIG. 7

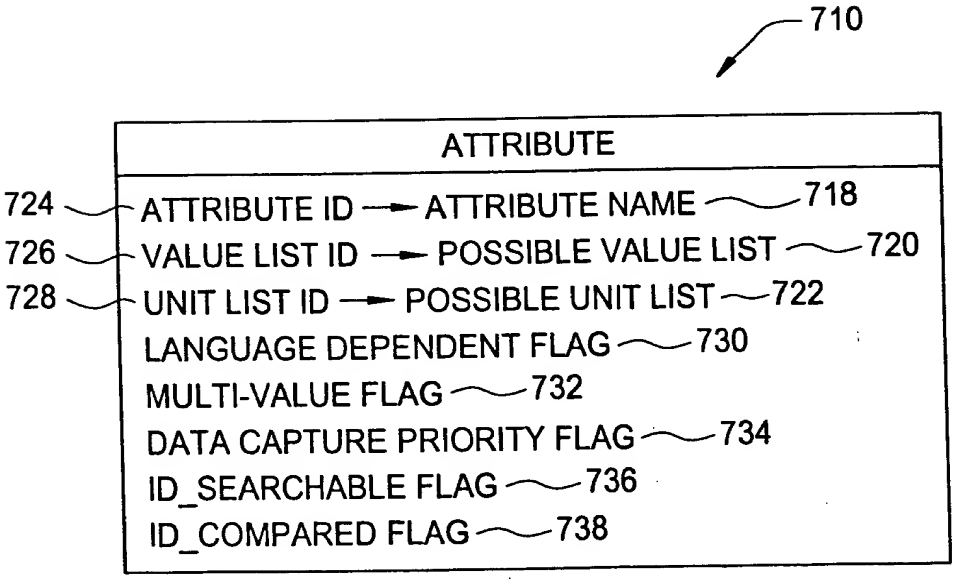

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



FIG. 8A

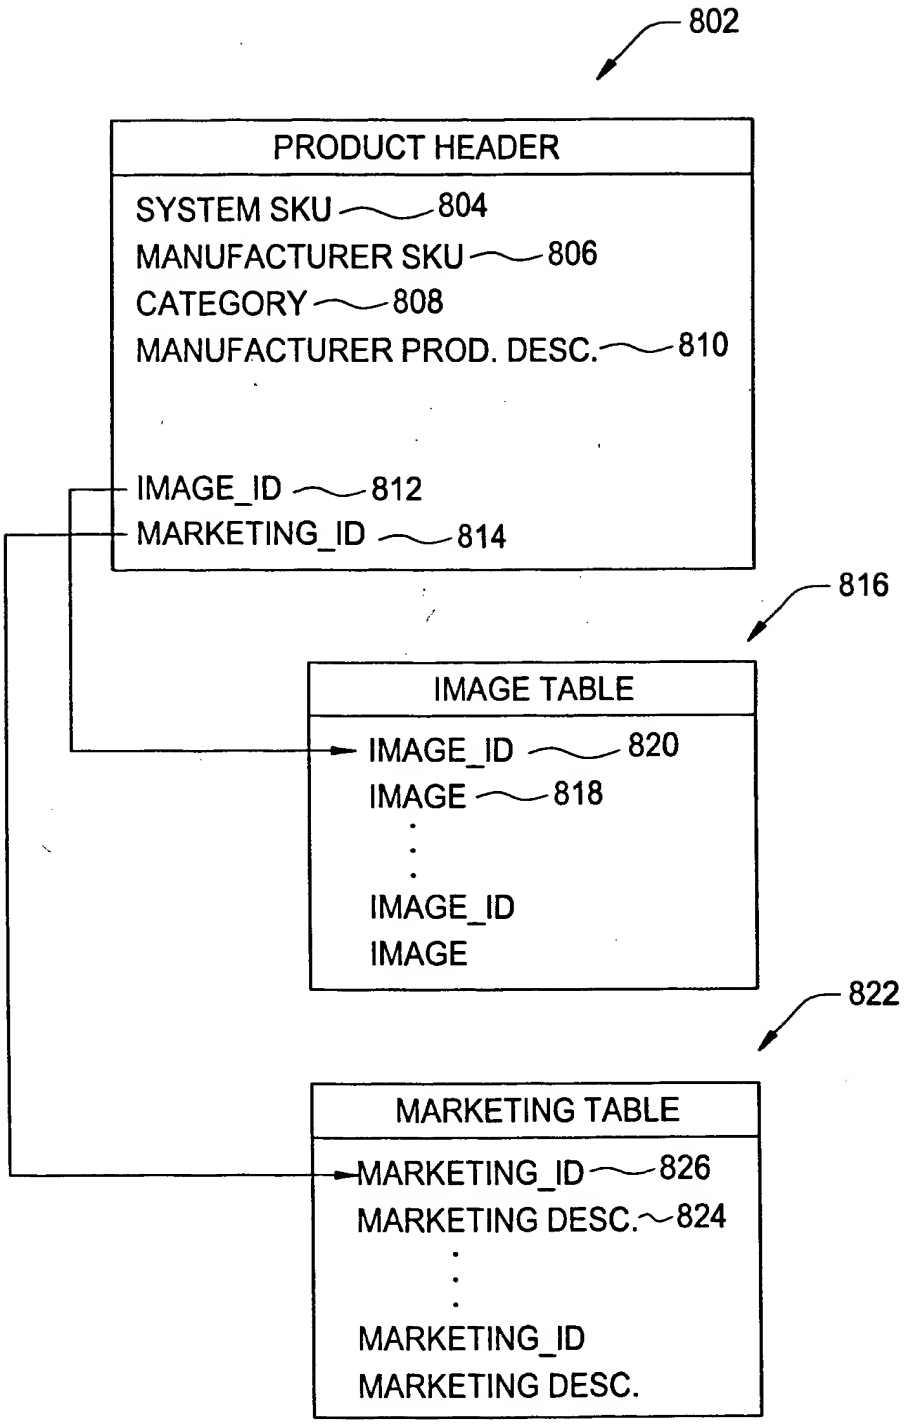

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



FIG. 8B

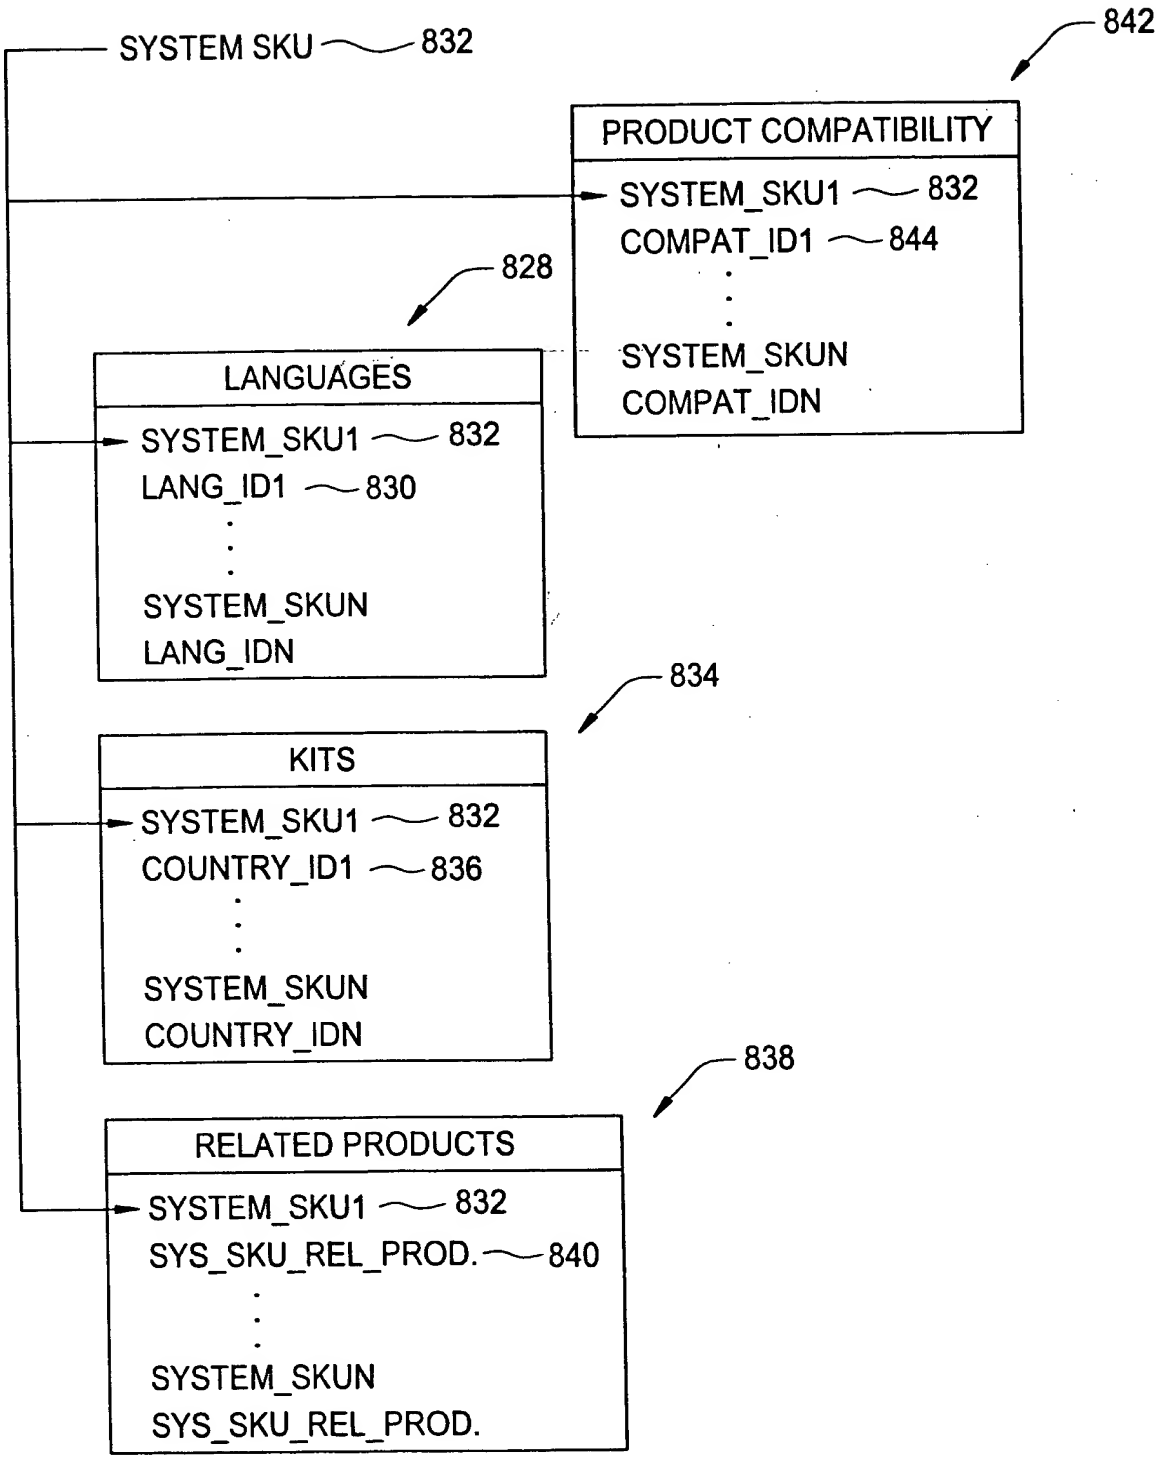

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



FIG. 8C

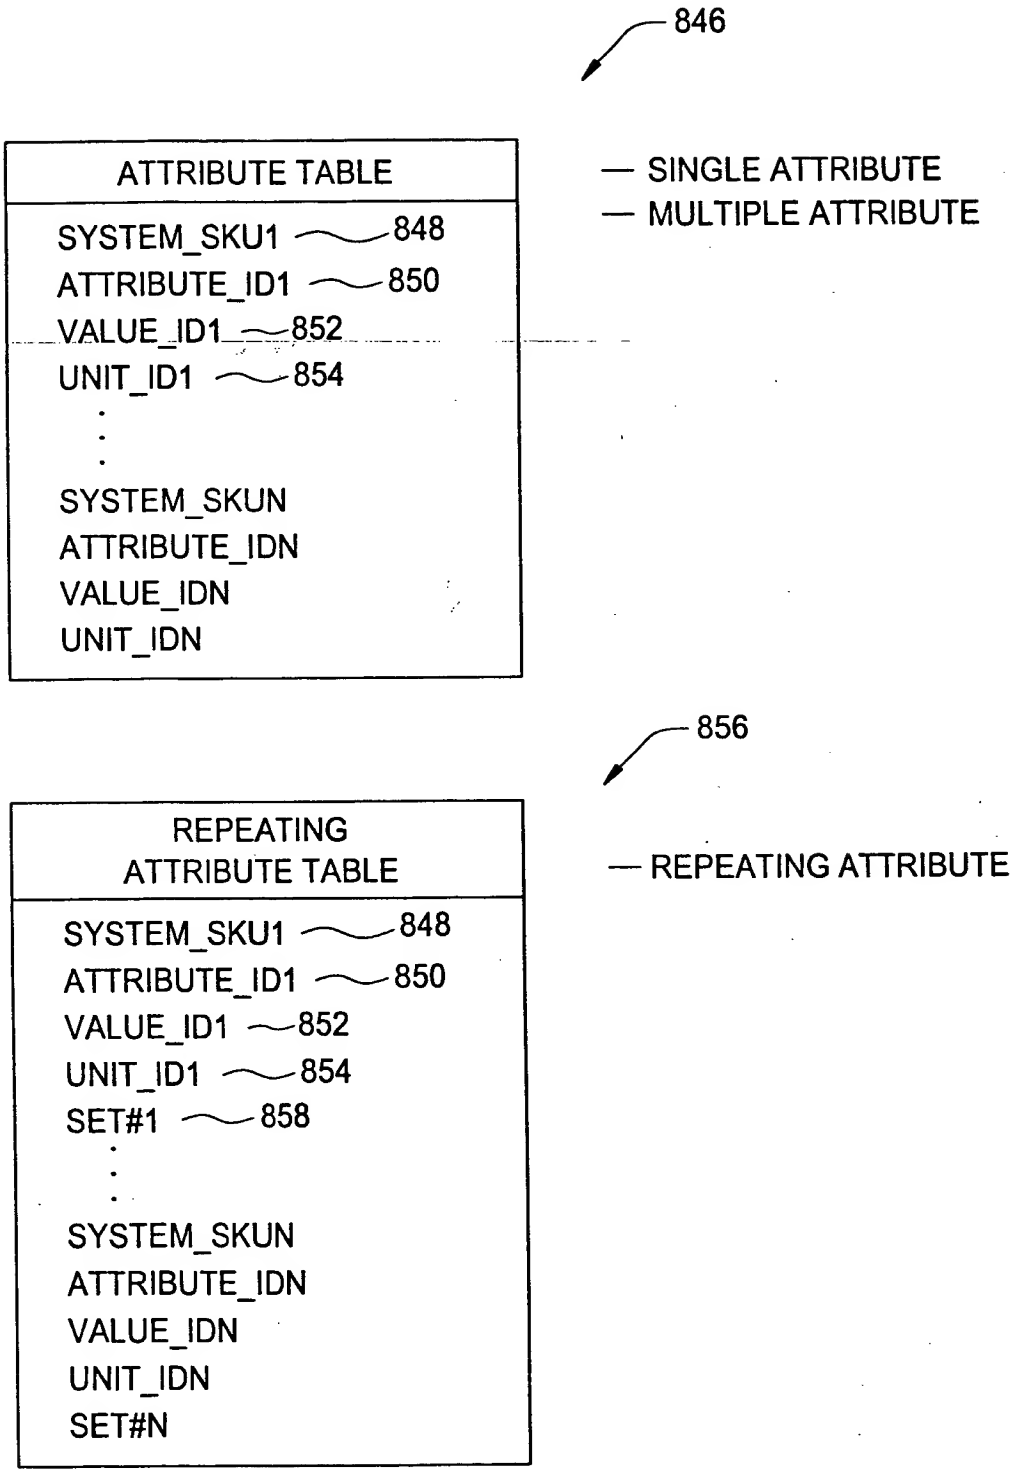

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



FIG. 9A



MODEL TABLES 902

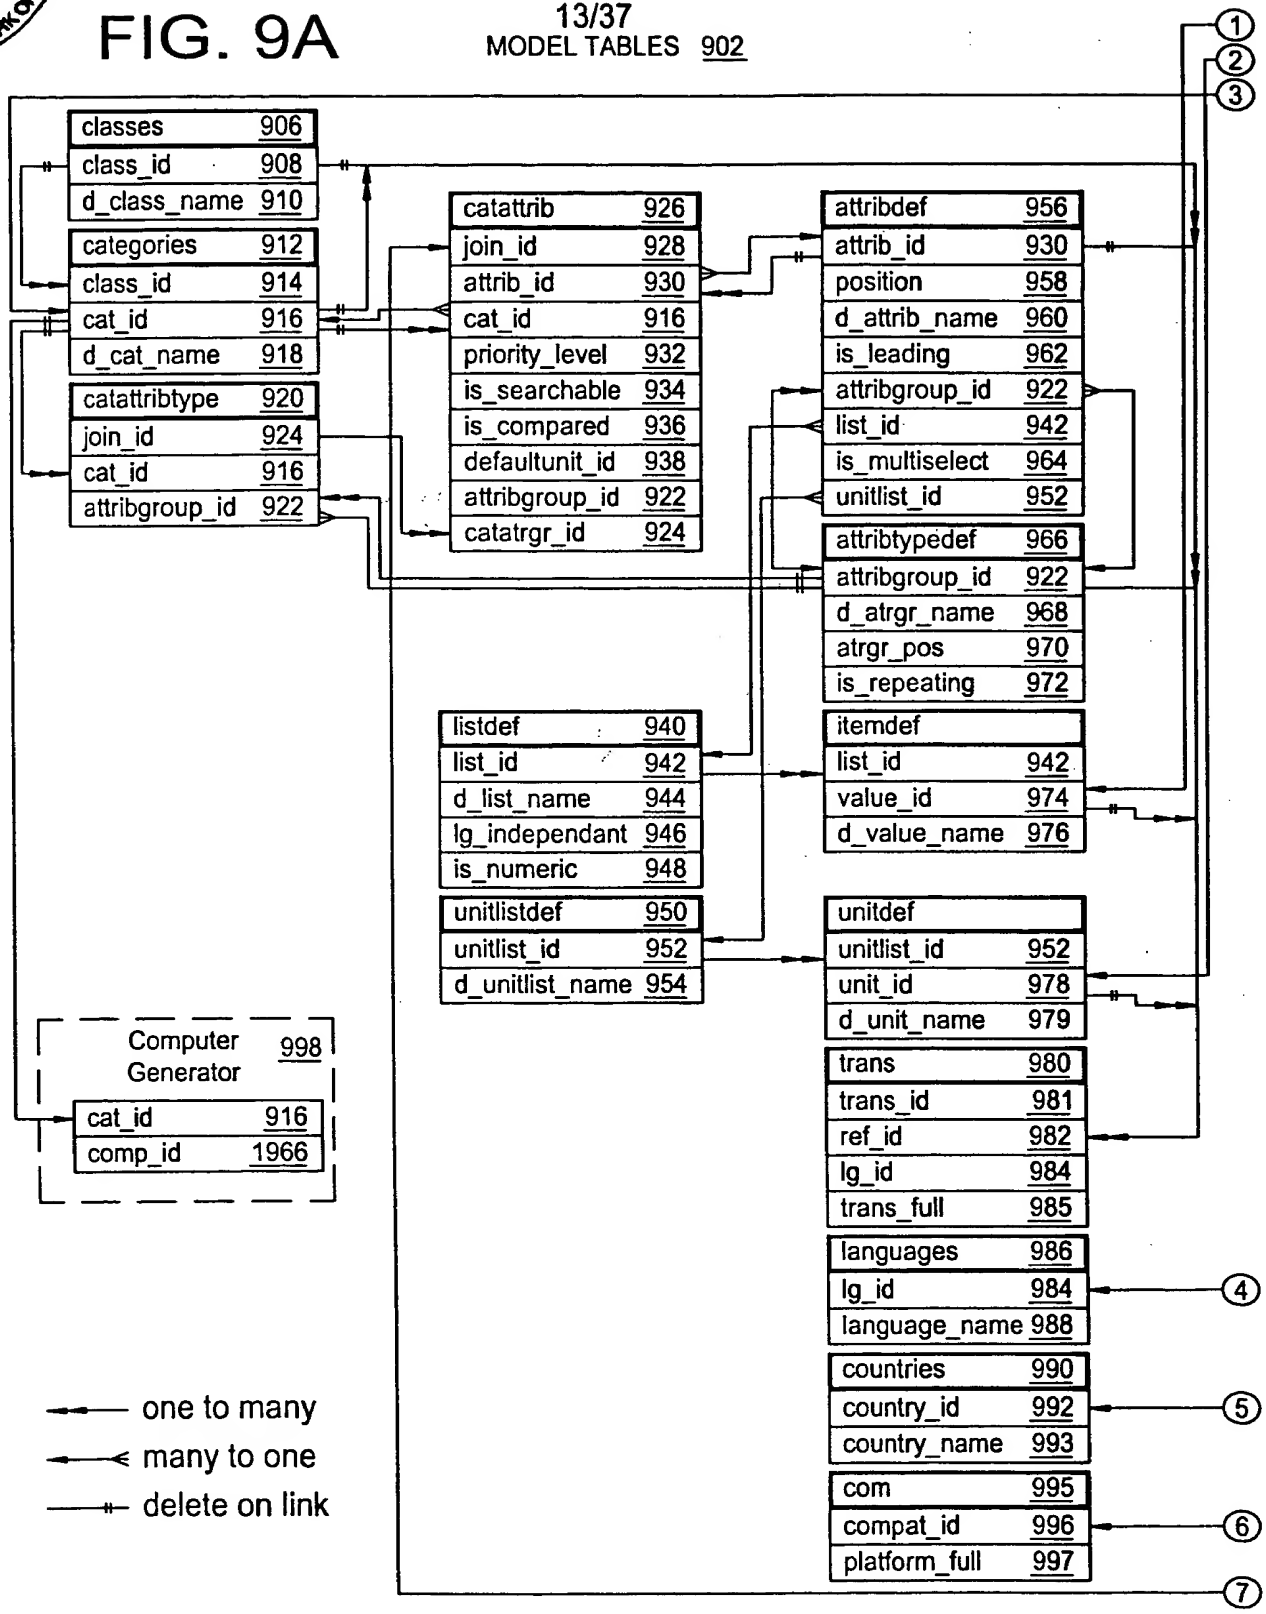

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



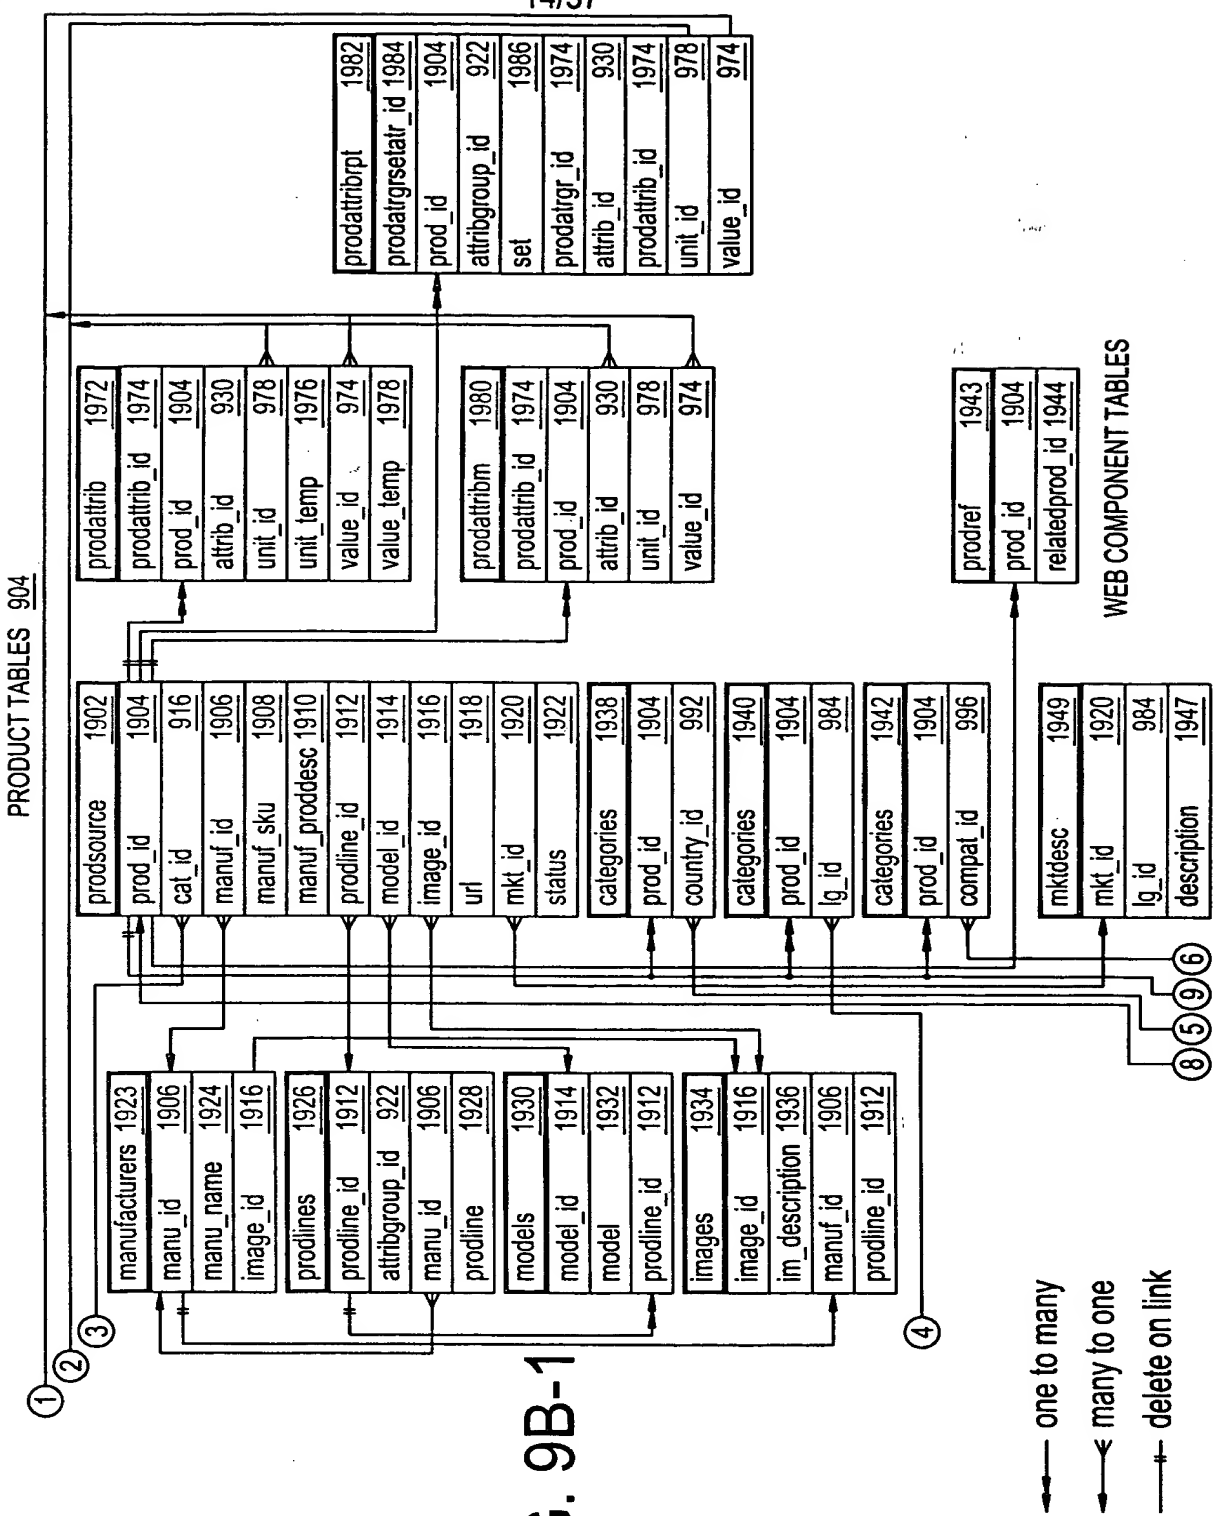


FIG. 9B-1

OIPE
DEC 22 2006
IAP44
PATENT & TRADEMARK OFFICE



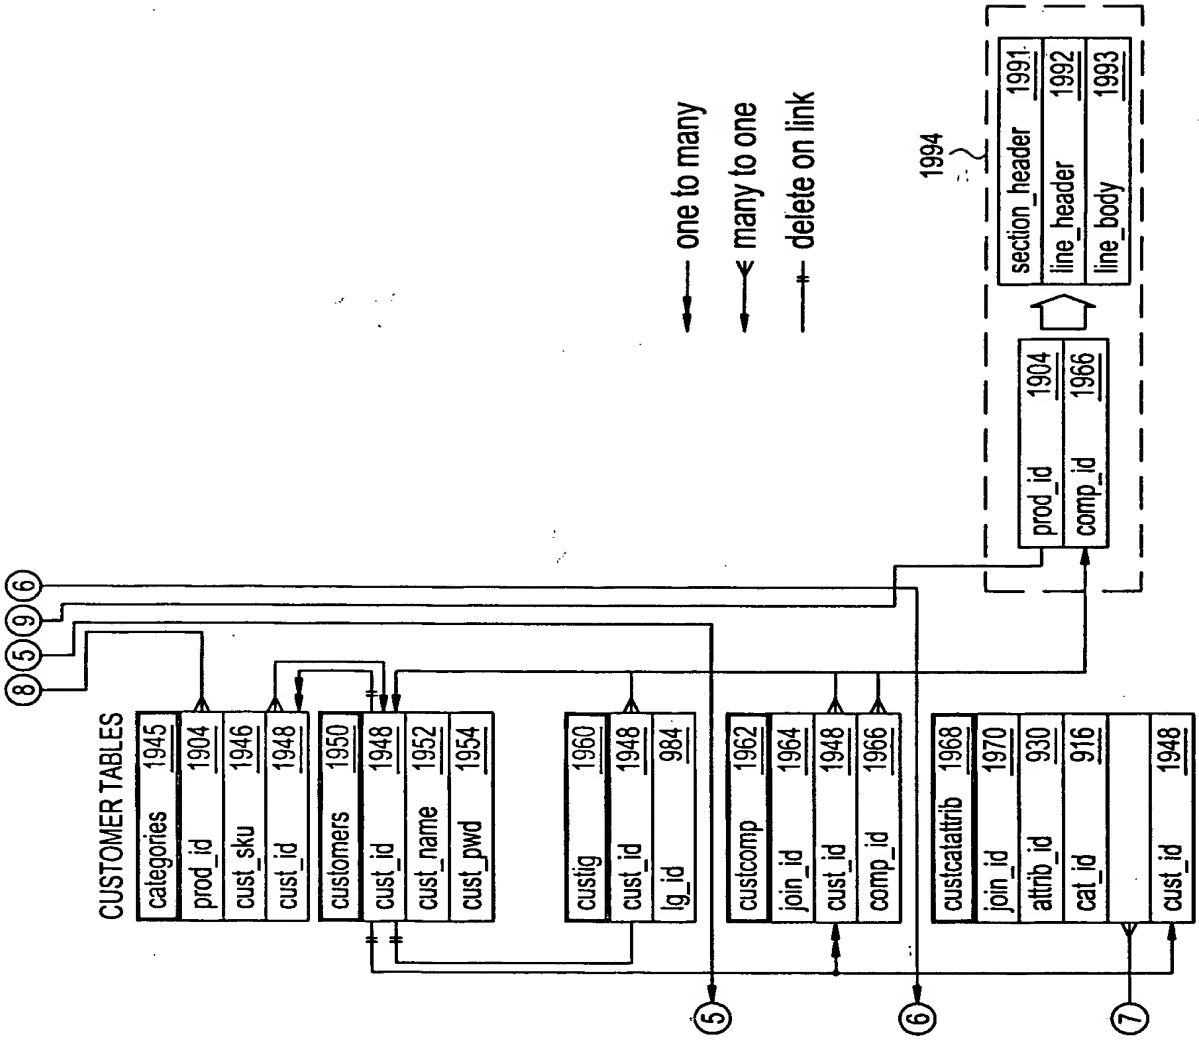


FIG. 9B-2

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



FIG. 9C

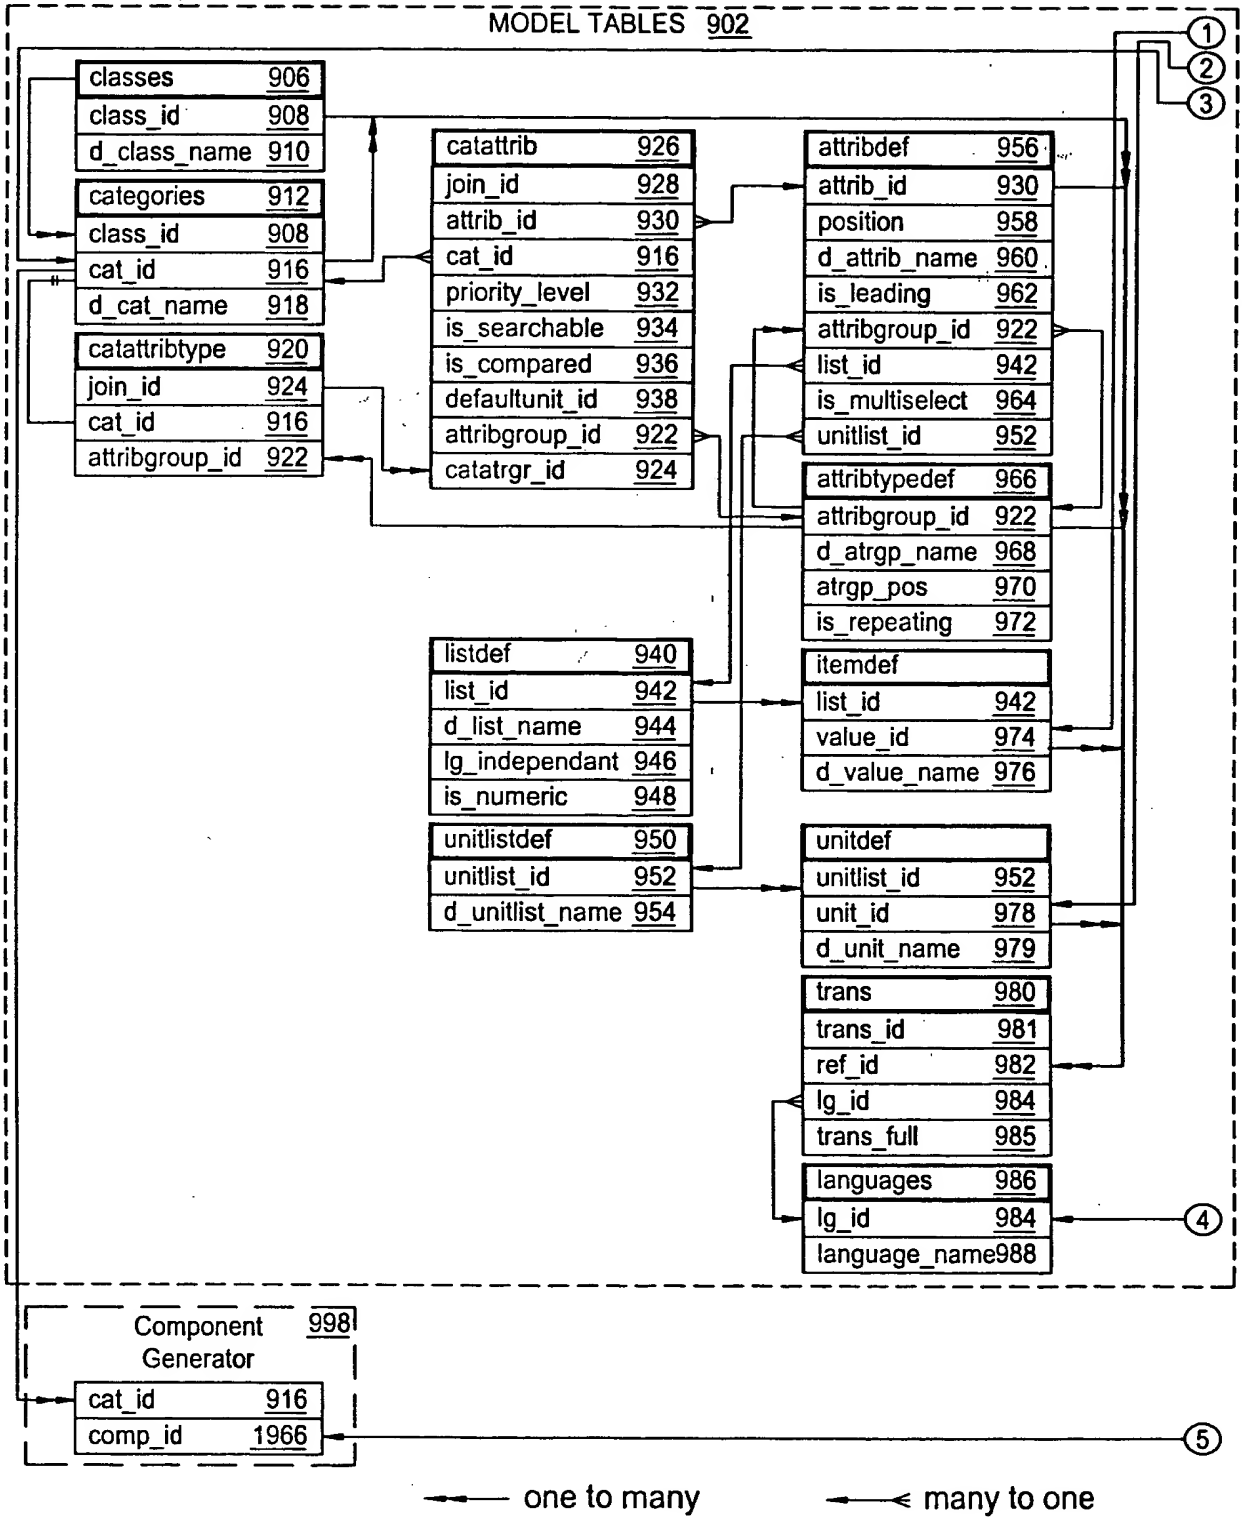

OIPE
DEC 22 2006
IAP44
PATENT & TRADEMARK OFFICE



FIG. 9D-1

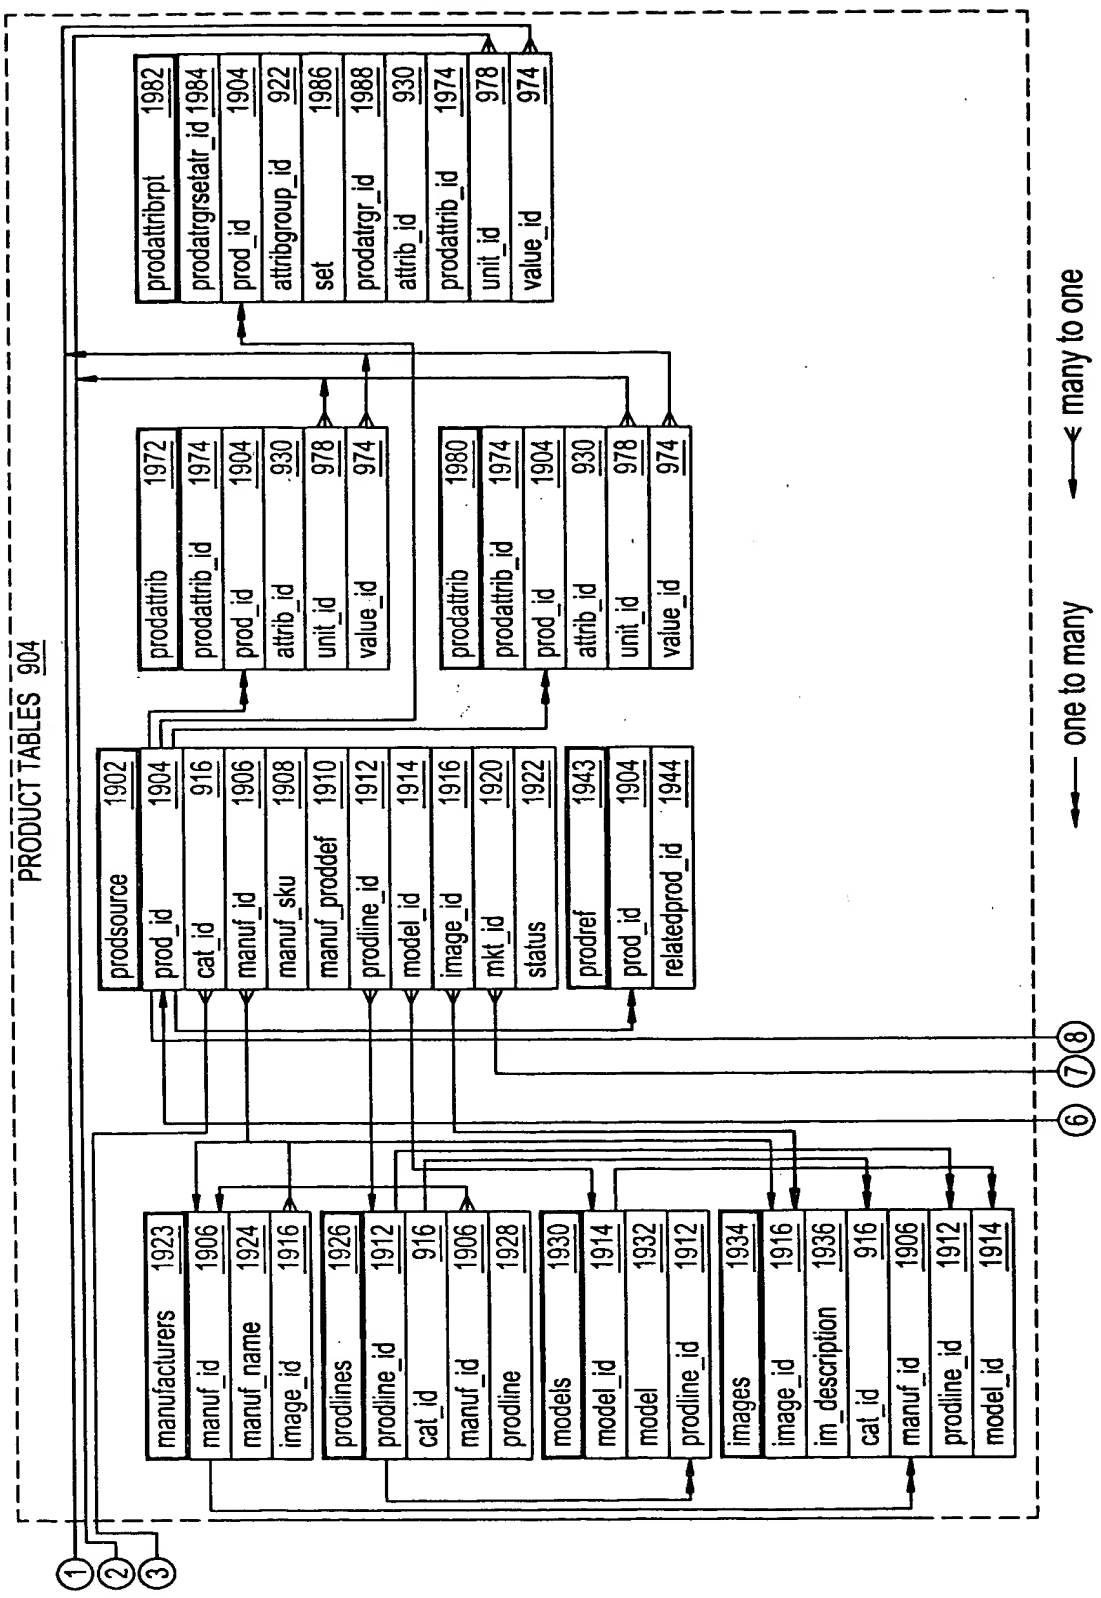

OIPE
DEC 22 2006
IAP44
PATENT & TRADEMARK OFFICE



FIG. 9D-2

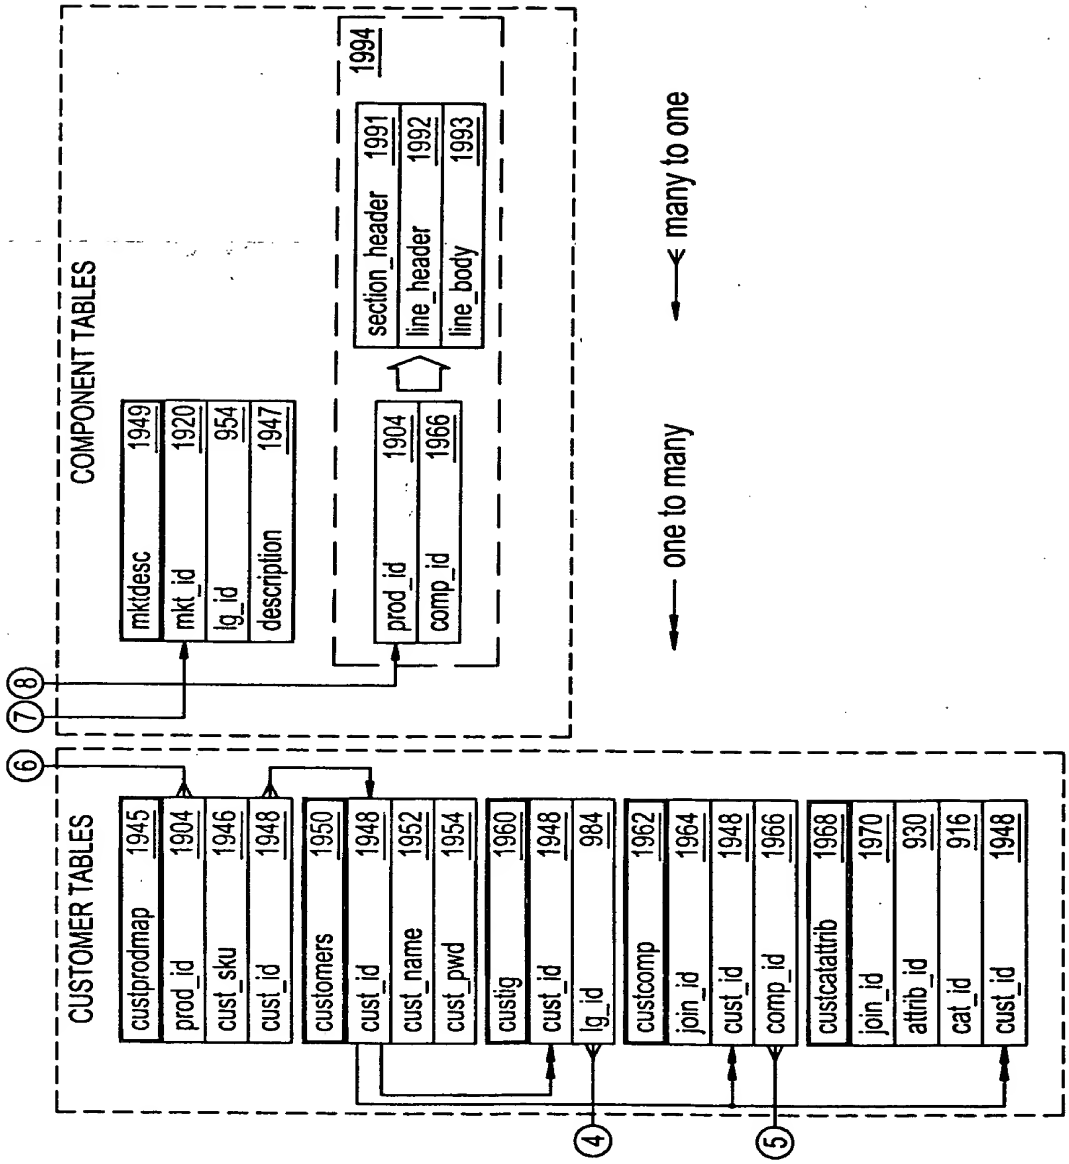

OIPE
DEC 22 2006
IAP44
PATENT & TRADEMARK OFFICE



FIG. 10A

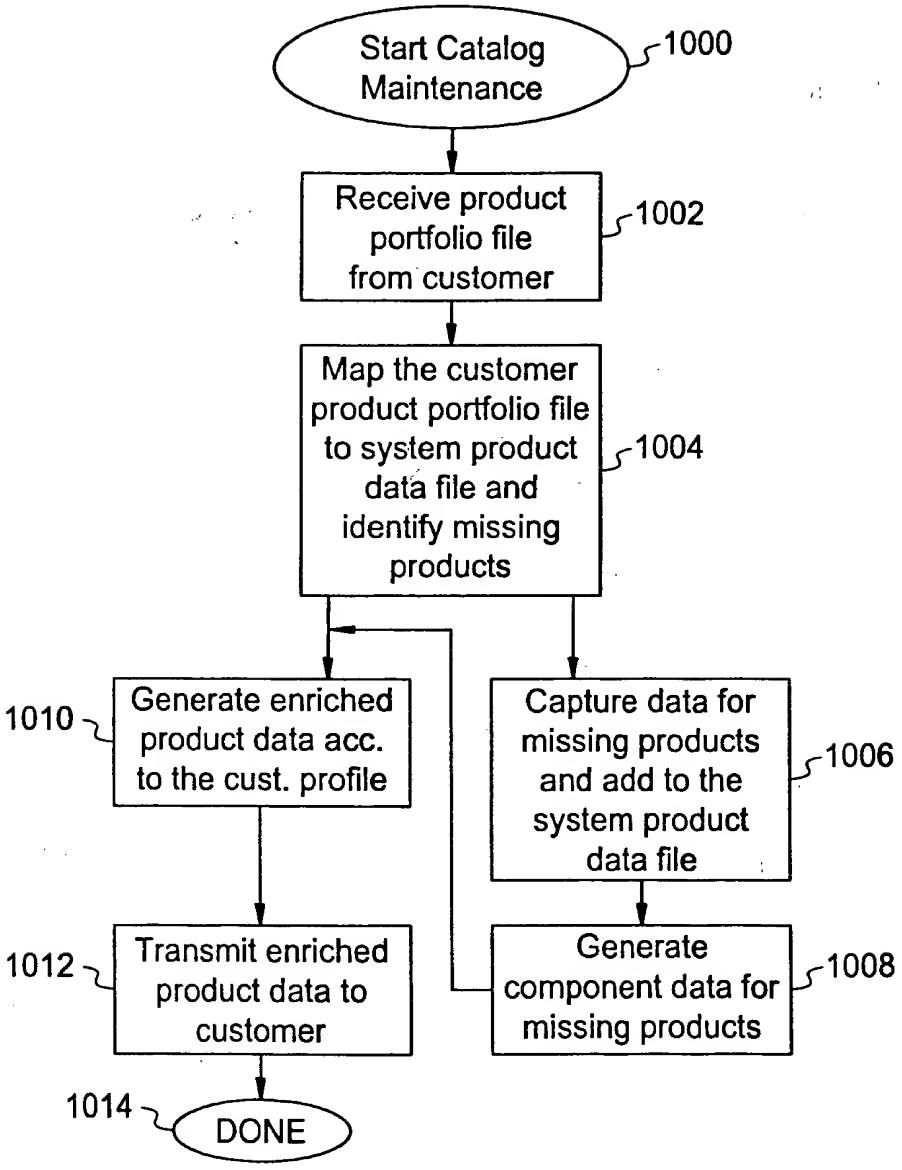

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



FIG. 10B

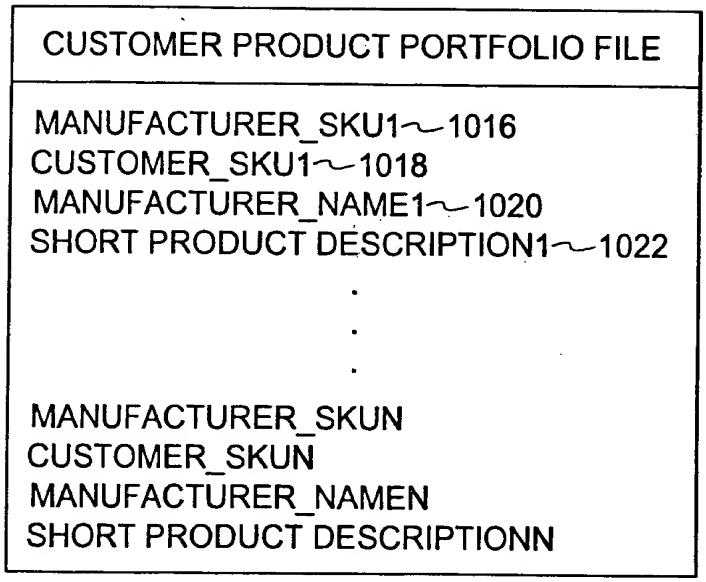

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



FIG. 11

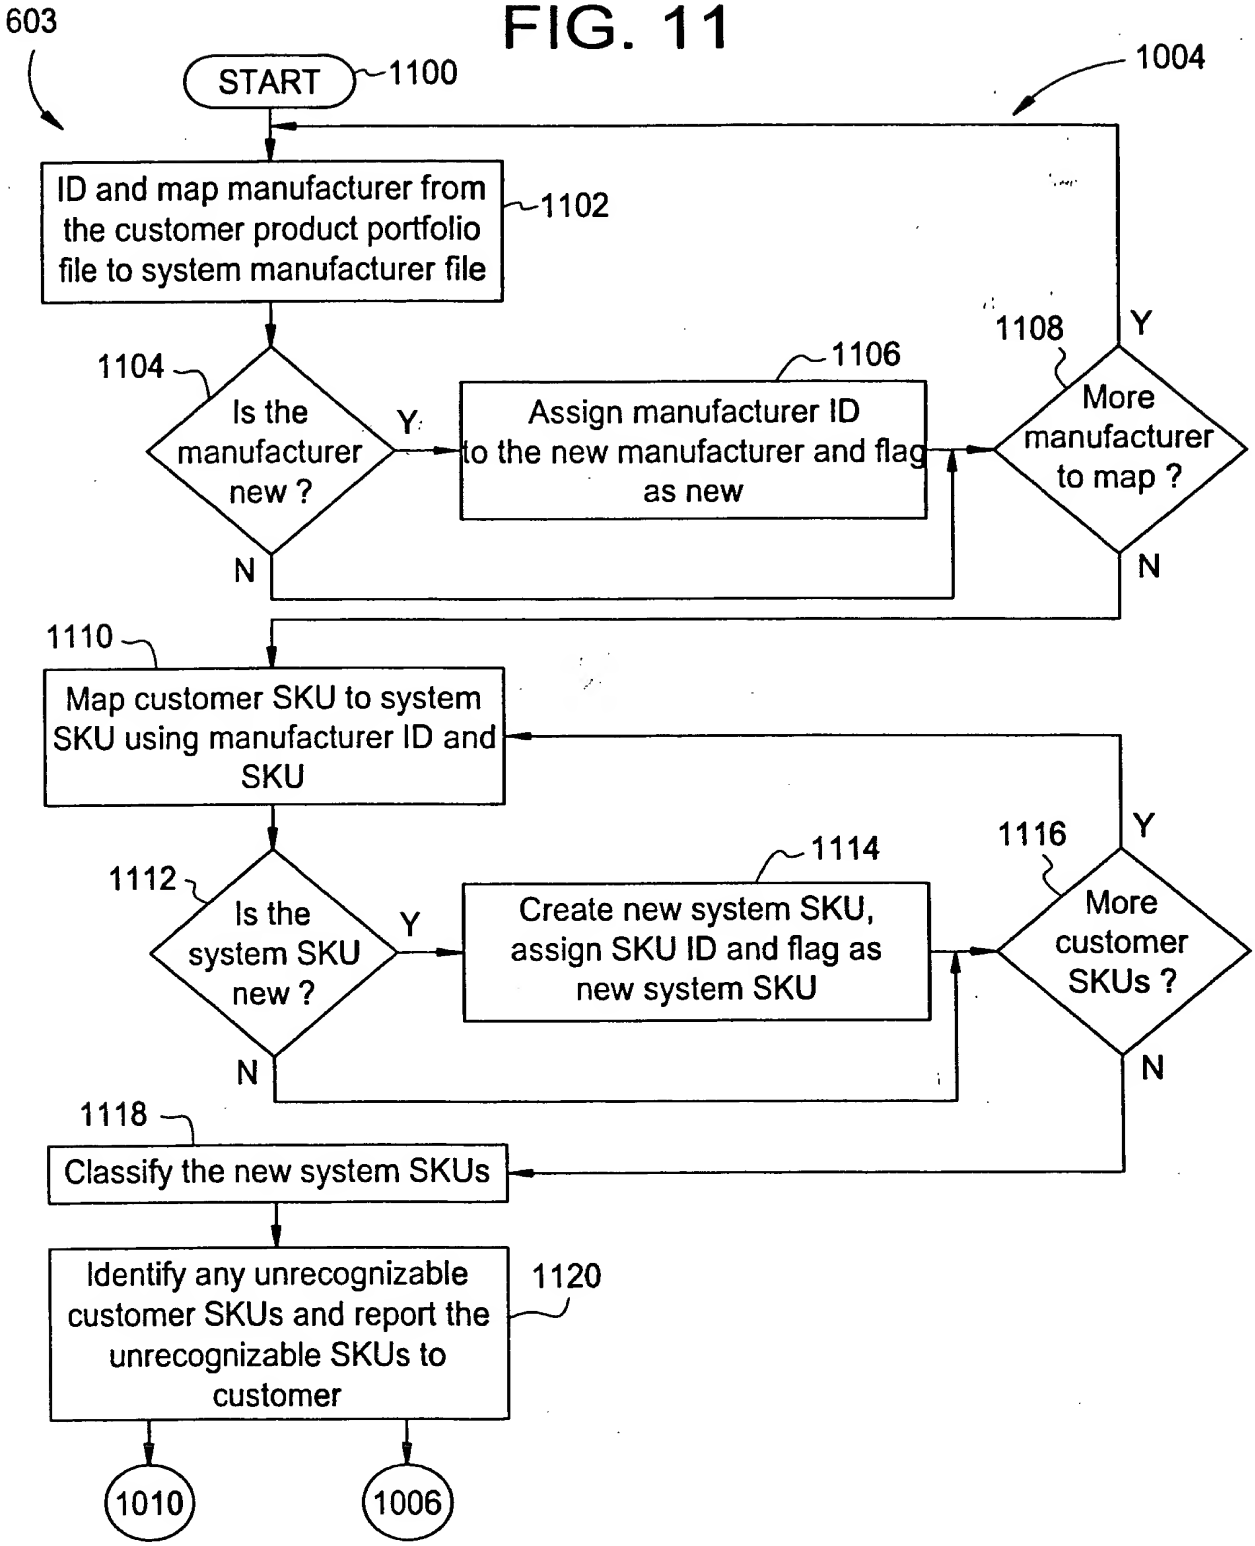

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE





FIG. 12A

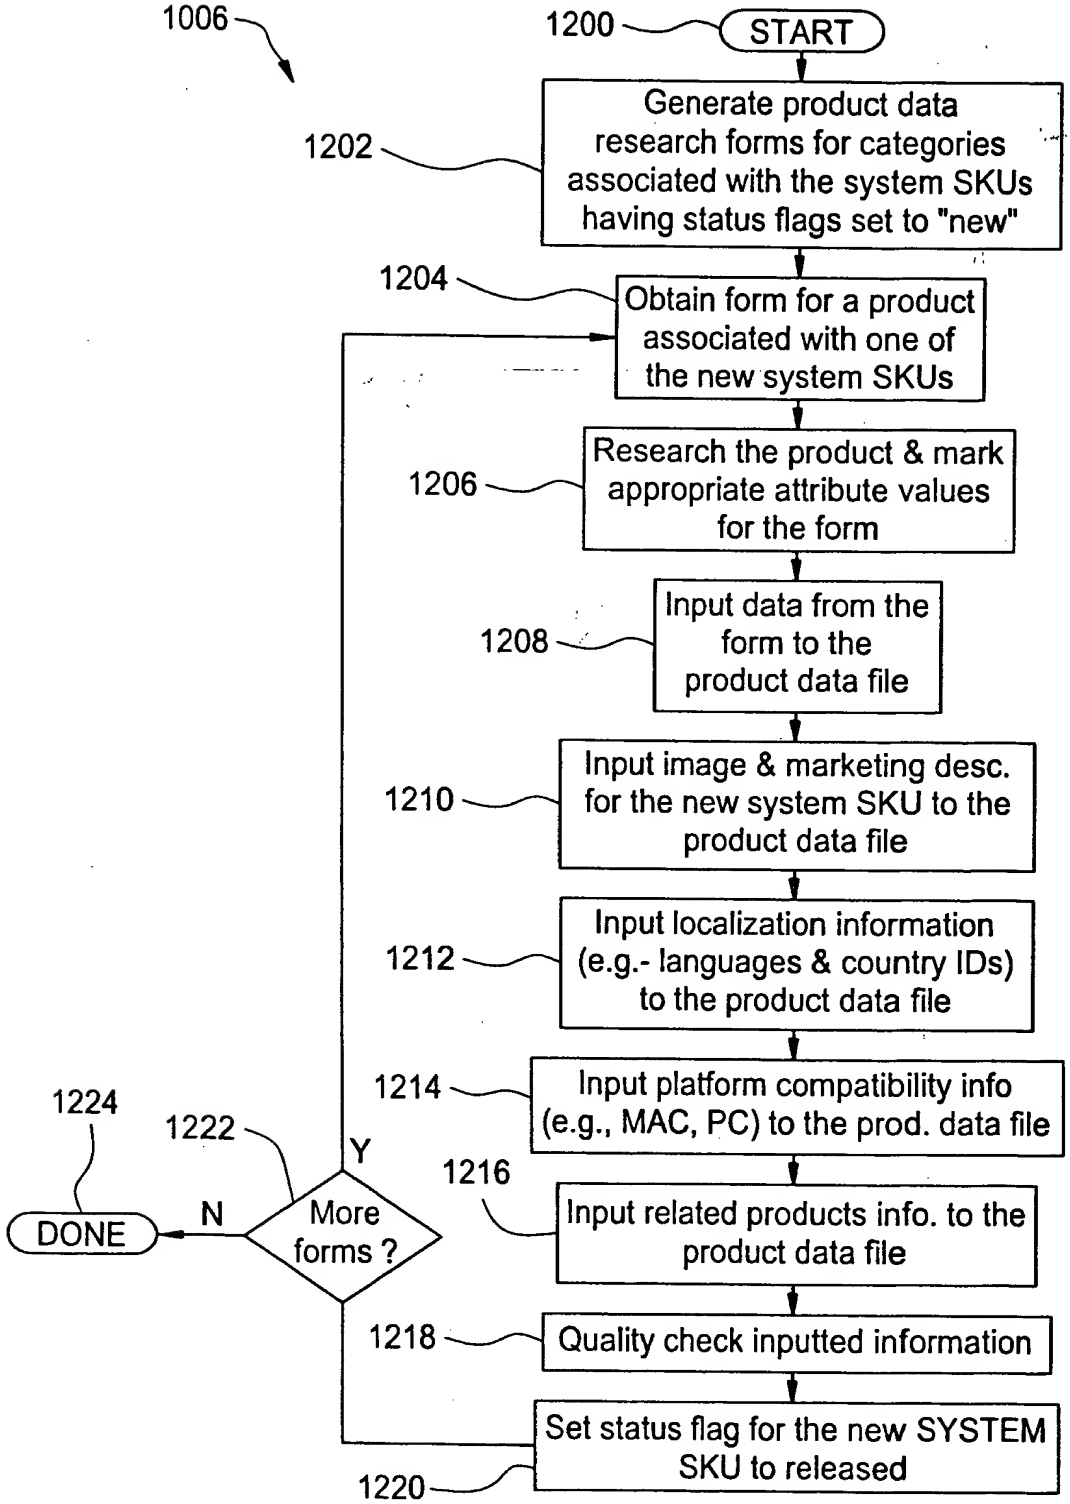

PATENT & TRADEMARK OFFICE
DEC 22 2006
JAP4
OIPE



# FIG. 12B-1

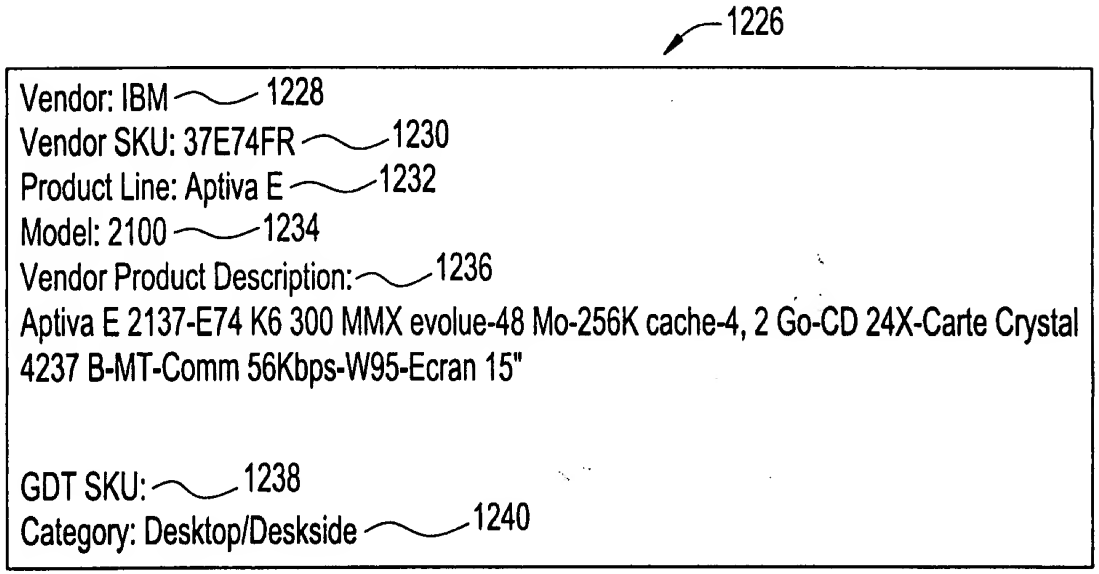


Completion constraint I

| | Completion Status | V | Username (1242) | Date/Time (1244) | Pages |
|---|---|---|---|---|---|
| | Additional values requested | | | | |
| | Requested values created | | | | |
| 1246 | All mandatory attributes researched | | | | |
| 1248 | Form transmitted to data capture | | | | |
| 1250 | Data capture completed | | | | |
| 1252 | Data checked | | | | |

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



# FIG. 12B-2

System - Type (Mandatory / Multi Value)
N/A | Network Computer | Personal Computer | Server | Workstation |

System - Designation (Mandatory / Multi Value)
N/A | Corporate Business | Home Use | Small Business |

Cabinet - Form Factor (Mandatory / Single Value)
N/A | Desktop | Desktop Slimline | Full Tower | Mid Tower | Mini Tower | Portable | Proprietary | Rack |

Cabinet - Built-in Devices (Optional / Multi Value)
N/A | None | Copier | Display | Keyboard | Microphone | Mouse | Pointing Stick | Printer | Scanner | Speaker | Status LCD | Stereo Speakers | Touchpad | Trackball |

Processor - Type (Mandatory / Single Value)
N/A | None | 6X86 | 6X86MX | 80186 | 80286 | 80386 | 80486 | 8086 | Celeron | JF-33 | K6 MMX | K6-2 | MediaGX | MIPS Processor | Pentium | Pentium II MMX | Pentium II Xeon | Pentium MMX | Pentium Pro | Power PC 603 | Power PC 604e | Power PC G3 | Sonet RISC 4700 |

Processor - Form Factor (Mandatory / Single Value) ~1260 — 1254, 1256 } 1258
N/A | External | Integrated | Internal | Plug-in Card | Plug-in Module |

Processor - Installed Qty (Mandatory / Single Value)
N/A | 0 | 1 | 12 | 128 | 144 | 15 | 16 | 160 | 18 | 192 | 196 | 2 | 20 | 24 | 256 | 288 | 3 | 32 | 35 | 384 | 4 | 40 | 468 | 48 | 512 | 56 | 6 | 64 | 72 | 768 | 8 | 80 | 90 | 96 | 96 | 960 |

Processor - Max Supported Qty (Mandatory / Single Value)
N/A | 0 | 1 | 12 | 128 | 144 | 15 | 16 | 160 | 18 | 192 | 196 | 2 | 20 | 24 | 256 | 288 | 3 | 32 | 35 | 384 | 4 | 40 | 468 | 48 | 512 | 56 | 6 | 64 | 72 | 768 | 8 | 80 | 90 | 96 | 96 | 960 |

Processor - Upgradability (Mandatory / Single Value)
N/A | Not Upgradable | Upgradable |

Processor - Manufacturer (Mandatory / Single Value)
N/A | AMD | Cyrix | DEC | IBM | Intel | MIPS | Motorola |

Processor - Clock Speed (Mandatory / Single Value)
N/A | 100 | 120 | 133 | 150 | 16 | 166 | 180 | 200 | 233 | 25 | 266 | 300 | 33 | 333 | 350 | 400 | 450 | 50 | 60 | 66 | 7.37 | 75 | 8 | 90 |
---
Hz | KHz | MHz | GHz |

Processor - Instuction Set (Optional / Single Value)
N/A | CISC x86 | IA-64 | RISC | x86-to-RISC |

Processor - Math Coprocessor (Optional / Single Value)
N/A | External | Integrated | Internal | Plug-in Card | Plug-in Module |

Processor - Primary Cache Size (Optional / Single Value)
N/A | 0 | 1 | 12 | 128 | 144 | 15 | 16 | 160 | 18 | 192 | 196 | 2 | 20 | 24 | 256 | 288 | 3 | 32 | 35 | 384 | 4 | 40 | 468 | 48 | 512 | 56 | 6 | 64 | 72 | 768 | 8 | 80 | 90 | 96 | 96 | 960 |
---
Byte | KB | MB | GB | TB |

Processor - Compliant Standards (Optional / Multi Value)
N/A | 100MHz Front Side Bus | AltiVec | Data Dependency Removal | Dual Independent Bus | Dynamic Execution | IEEE 754-compatible FPU | MMX instructions set | Multi-Branch Prediction | Out-Of-Order Completion | Register Renaming | SEC Cartridge Packing | Sixth-generation | Socket 7-compatible | Speculative Execution | Superpipelined | Superscalar | System Management Mode (SMM) |

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



# FIG. 12B-3

Mainboard - Data Bus Speed (Mandatory / Single Value)
N/A | 100 | 16 | 33 | 50 | 60 | 66 | 75 | 83 |
---
Hz | KHz | MHz | GHz |

Mainboard - Chipset Type / Vendor (Optional / Single Value)
N/A | ALi Aladdin IV | ALi Aladdin V | Intel 430FX (Trition) | Intel 430HX (Trition II) | Intel 430LX (Mercury) | Intel 430MX (Mobile Trition) | Intel 430NX (Neptune) | Intel 430TX | Intel 430VX (Trition III) | Intel 440BX | Intel 440EX | Intel 440LX | SiS 5571 | SiS 5591 | SiS 5597/5598 | VIA MVP3 | VIA VP1 | VIA VP2/97 | VIA VP3 | VIA VPX/97 | VIA VXPro |

Mainboard - BIOS Type / Vendor (Optional / Single Value)
N/A | AMI | Award | Phoenix |

Memory / Cache - Type (Mandatory / Single Value)
N/A | None | DRAM | EROM | Flash | L2 Cache | ROM | SRAM |

Memory / Cache - Form Factor (Optional / Single Value)
N/A | DIMM 100-PIN | DIMM 168-PIN | Proprietary | SIMM 30-PIN | SIMM 72-PIN | SO DIMM 144-PIN | SO DIMM 72-PIN | SO DIMM 84-PIN |

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



# FIG. 13A-1

## Proof Data Sheet

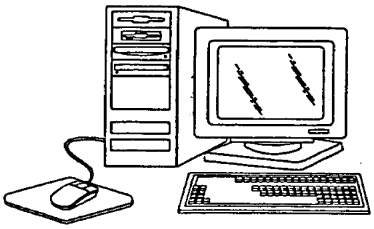

| | | |
|---|---|---|
| Data Language | French | 1300 |
| Vendor | IBM | 1302 |
| Vendor SKU | 37E74FR | 1304 |
| Quantity | 1 | 1306 |
| GDT SKU | S0000654 | 1308 |

**Standardized Description** ~1310

Aptiva E MT 1 x K6 MMX 300 - Niveau 2 256 Ko - Memoire Vive 48 Mo - DD 4.2 Go - CD 24x - Mdm 56.6 Kbps - Microsoft Windows 95 - Moniteur 15"

**Marketing Description** ~1312

Puissance surprenante a un prix tres abordable - Le meilleur de la micro avec puissance, performance et de remarquables capacites multimedia a un prix abordable.
De plus la Suite Bureautique Lotus Smartsuite comprenant Lotus WordPro pour le traitement de texte, Lotus 1-2-3 pour les tableurs, Lotus FreeLance Graphics pour les presentations sont inclus.

Capacite d'extension - Il croit avec vous. La serie E vous offre une capacite de croissance unique dans cette gamme de prix. 2 ports USB pour un "plug and play" facile ainsi que 5 slots et 2 baies disponibles.

Un support technique prime - Le choix des lecteurs "PC Magazine" pour le service et le support. Faites le choix de confiance avec IBM Aptiva.

**Extended Description** ~1314

| | | |
|---|---|---|
| 1 | Format (LxPxH) / Poids | Minitour 19.5 cm x 45.5 cm x 42.9 cm / 12.7 kg |
| 2 | Processeur | 1 x AMD K6 MMX 300 MHz |
| 3 | Memoire Cache Installe(e) (Max) | 256 Ko (256 Ko) Cache de Niveau 2 |
| 4 | Memoire Vive Installe(e) (Max) | 48 Mo (256 Mo) SDRAM DIMM 168 broches |
| 5 | Lecteur de Disquette | 1x 1.44 Mo 3.5" HD interne |
| 6 | Lecteur de Disque Dur | 1 X 4.2 Go interne |
| 7 | Stockage CD / DVD | 1 X 650 Mo CD-ROM 24x interne |
| 8 | Stockage Amovible | Aucun(e) |
| 9 | Amovible de Stockage (2eme) | Aucun(e) |
| 10 | Affichage | 15" tube cathodique conventionnel 24-bit couleur bureau |
| 11 | Sortie Video | Carte Graphique ATI Rage II+ 2 MB (2 MD) SGRAM |
| 12 | Sortie Audio | Carte son 16-Bit 44.1 KHz son 3D |
| 13 | Telecommunications | |
| 14 | Reseaux | Aucun(e) |
| 15 | Alimentation | 115/220 V (50/60 Hz) |
| 16 | Systeme d'Exploitation | Microsoft Windows 95 |
| 17 | Garantie | 1 annee de garantie |

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



# FIG. 13A-2

**Technical Specifications** ~1316

| | | |
|---|---|---|
| ***1*** | ***General*** | |
| 2 | Format Systeme | Minitour |
| 3 | Dimensions (LxPxH) / Poids | 19.5 cm x 45.5 cm x 42.9 cm / 12.7 kg |
| 4 | Couleur Boitier | Blanc |
| ***5*** | ***Processeur*** | |
| 6 | Processeur Installe (Max) | 1 (1) x AMD K6 MMX 300 MHz |
| 7 | Bus Systeme Principal | 66 MHz |
| ***8*** | ***Memoire*** | |
| 9 | Memoire Cach Installe(e) (Max) | 256 Ko (256 Ko) Cache de Niveau 2 - Write-Back Cache |
| 10 | Memoire Vive Installe(e) (Max) | 48 Mo (256 Mo) DRAM - SDRAM DIMM 168 broches |

OIPE IAP4 DEC 22 2006 PATENT & TRADEMARK OFFICE



# FIG. 13A-3

| | | |
|---|---|---|
| ***11*** | ***Stockage*** | |
| 12 | Lecteur de Disquette | 1 x 1.44 Mo 3.5" HD interne |
| 13 | Lecteur de Disque Dur | 1 x 4.2 Go interne |
| 14 | Stockage CD / DVD | 1 x 650 Mo CD-ROM 24x interne CD-DA, CD-XA, Kodak PhotoCD |
| 15 | Stockage Amovible | Aucun(e) |
| 16 | Amovible de Stockage (2eme) | Aucun(e) |
| 17 | Controleur de Stockage | IDE / EIDE integre |
| 18 | Controleur de Stockage (2eme) | Aucun(e) |
| ***19*** | ***Affichage*** | |
| 20 | Affichage Type | tube cathodique 15" conventionnel |
| 21 | Resolution Max | 24-bit couleur / 1024 x 768 multiscan |
| ***22*** | ***Video*** | |
| 23 | Sortie Video | Carte Graphique ATI Rage II+ integre |
| 24 | Memoire / Video Installe (Max) | 2 Mo (2 Mo) SGRAM |
| 25 | Resolution Max (externe) | 16-bit couleur / 1024 X 768 |
| 26 | Video Supportee | RGB |
| 27 | Entree Video | Aucun(e) |
| 28 | Video Suportee | |
| ***29*** | ***Audio*** | |
| 30 | Sortie Audio | Carte son integre(e) AdLib, Sound Blaster, Sound Blaster 16/Pro, Microsoft WSS 1.0/2.0, MPU-401 |
| 31 | Mode Sortie Son | 16-Bit 44.1 KHz son 3D |
| 32 | Entree Audio | Microphone externe |
| ***33*** | ***Telecommunications / Reseaux*** | |
| 34 | Modem / Comm. | Fax / modem interne K56Flex DSVD jeu de commandes AT Hayes |
| 35 | Debit de Transfert Max (Fax) | 56.6 Kbps (14.4 Kbps) |
| 36 | Reseau | Aucun(e) |
| 37 | Protocole de Gestion a Distance | |
| ***38*** | ***Extension(s) / Connectivite*** | |
| 39 | Baie(s) d'Extension Total (Libre) | 1 (0) x interne 3.5" \| 1 (0) x accessible de front 3.5" \| 3 (2) x accessible de front 5.25" |
| 40 | Logement(s) d'extensionTotal (Libre) | 1 (1) x Partage PCI / ISA pleine-longueur \| 3 (2) x ISA pleine-longueur \| 2 (2) x PCI pleine-longueur |
| 41 | Port(s) Total (Libre) / Type de Connecteur | 1 (1) x modem ligne de sortie / RJ-11 femelle \| 1 (1) x modem ligne d'entree / RJ-11 femelle \| 1 (0) x audio ligne de sortie / Prise Mini-Phono Stereo 3.5 mm femelle \| 1 (1) x audio ligne d'entree / Prise Mini-Phono Stereo 3.5 mm femelle \| 1 (0) x microphone Entree / Prise Mini-Phono Stereo 3.5 mm femelle \| 1 (1) x Gameport / MIDI generique / 15 broches D-Sub (DB-15) femelle \| 1 (0) x affichage / video VGA / VBE / 15 broches D-Sub (DB-15) femelle \| 1 (0) x souris generique / 6 broches mini-DIN (Style PS/2) femelle \| 1 (0) x clavier generique / 6 broches mini-DIN (Style PS/2) femelle \| 2 (2) X serie USB / prise 4 broches USB femelle \| 1 (1) x serie RD-232 / 9 broches D-Dub (DB-9) male \| 1 (1) x parallele IEEE 1284 (EPP/ECP) / 25 broches D-Sub (DB-25) femelle |

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



# FIG. 13A-4

| | | |
|---|---|---|
| ***42*** | ***Cable(s) / Peripherique(s)*** | |
| 43 | Type de Peripherique d'Entree | Clavier, souris |
| ***44*** | ***Divers*** | |
| 45 | Normes | Plug and play |
| 46 | Dispositifs de Securite | |
| 47 | Caracteristiques d'Environnement | 10 °C / 35 °C / 20 -80% |
| ***48*** | ***Alimentation*** | |
| 49 | Type de Peripherique | Alimentation interne |
| 50 | Tension Requise | 115/220 V ± 10% (50/60 Hz) |
| 51 | Consommation en Fonctionnement | 200 Watts |
| ***52*** | ***Systeme d'exploitation / Lociciel*** | |
| 53 | Systeme d'Exploitation Fourni | Microsoft Windows 95 preinstalle |
| 54 | Logiciel(s) Inclu(s) | Lotus SmartSuite, support & utilitaires |
| ***55*** | ***Garantie*** | |
| 56 | Service / Maintenance | 1 annee de garantie |
| 57 | Service / Details de la maintenance | 1 an x garantie limitee Retour Atelier |

DEC 22 2006 IAP44 PATENT & TRADEMARK OFFICE



FIG. 13B-1

Desktop / Deskside ~1318
Technical Specifications ~1320

| |General| ~1322 | |
|---|---|---|
| |Product Form Factor( )| ~1324 | |Form Factor (V)| ~1326 |
| |Dimensions|(WxDxH)|/|Weight| | |Dimensions / Weight - Width (V)|Dimensions / Weight - Width (U)|x(LR)|Dimensions / Weight - Depth (V)|Dimensions / Weight - Depth (U)|x(LR)|Dimensions / Weight - Height (V)|Dimensions / Weight - Height (U)|/(LR) |Dimensions / Weight - Weight (V)|Dimensions / Weight - Weight (U)| |
| |Enclosure Color ( )| | |Miscelleneous - Color (V)| |
| |Processor (N)| | |
| |Processor (N)|Installed|(|Max|)| | |Processor - Installed Qty (V)|((R)|Processor - Max Supported Qty (V)|(L)|x(R)|Processor - Manufacturer (V)|Processor - Type (V)|Processor - Clock Speed (V)|Processor - Clock Speed (U)| |
| |Data Bus Speed (N)| | |Mainboard - Data Bus Speed (V)|Mainboard - Data Bus Speed (U)|Mainboard - Chipset Type / Vendor (V)|Mainboard - BIOS Type / Vendor (V)| |
| |Memory| | |
| |Memory / Cache (N)|Installed|(|Max|)| | |Memory / Cache - Installed Size (V)|Memory / Cache - Installed Size (U)|((R)|Memory / Cache - Max Supported Size (V)|Memory / Cache - Max Supported Size (U)|)(L)|Memory / Cache - Type (V)|-()|Memory / Cache - Technology (V)| |
| |Memory / RAM (N)|Installed|(|Max|)| | |Memory / RAM - Installed Size (V)|Memory / RAM - Installed Size (U)|((R)|Memory / RAM - Max Supported Size (V)|Memory / RAM - Max Supported Size (U)|)(L)|Memory / RAM - Type (V)|-()|Memory / RAM - Technology (V)|Memory / RAM - Form Factor (V)| |
| |Storage| | |
| |Storage Floppy Drive (N)| | |Storage Floppy Drive - Installed Qty (V)|x(LR)|Storage Floppy Drive - Formatted Capacity (V)|Storage Floppy Drive - Formatted Capacity (U)|Storage Floppy Drive - Type (V)|Storage Floppy Drive - Form Factor (V)| |
| |Storage Hard Drive (N)| | |Storage Hard Drive - Installed Qty (V)|x(LR)|Storage Hard Drive - Formatted Capacity (V)|Storage Hard Drive - Formatted Capacity (U)|Storage Hard Drive - Form Factor (V)|Storage Hard Drive - Compliant Standards (V)| |
| |Storage CD / DVD (N)| | |Storage CD / DVD - Installed Qty (V)|x(LR)|Storage CD / DVD - Formatted Capacity (V)|Storage CD / DVD - Formatted Capacity (U)|Storage CD / DVD - Type (V)|Storage CD / DVD - CD / DVD Read Speed (V)|Storage CD / DVD - Form Factor (V)|Storage CD / DVD - Compliant Standards (V)| |
| |Storage Removable (N)| | |Storage Removable - Installed Qty (V)|x(LR)|Storage Removable - Native Capacity (V)|Storage Removable - Native Capacity (U)|Storage Removable - Type (V)|Storage Removable - Form Factor (V)|Storage Removable - Compliant Standards (V)| |
| |Storage Removable (2nd) (N)| | |Storage Removable (2nd) - Installed Qty (V)|x(LR)|Storage Removable (2nd)- Native Capacity (V)|Storage Removable (2nd) - Native Capacity (U)|Storage Removable (2nd) - Type (V)|Storage Removable (2nd) - Form Factor (V)|Storage Removable (2nd) - Compliant Standards (V)| |

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



# FIG. 13B-2

| | |
|---|---|
| \|Storage Controller (N)\| | \|Storage Controller (2nd) - Installed Qty (V)\|Lx(LR)\|Storage Controller - Type (V)\|Storage Controller - Form Factor (V)\|Storage Controller - RAID Level (V)\| |
| \|Storage Controller (2nd) (N)\| | \|Storage Controller (2nd) - Installed Qty (V)\|Lx(LR)\|Storage Controller (2nd)- Type (V)\|Storage Controller (2nd)- Form Factor (V)\|Storage Controller (2nd)- RAID Level (V)\| |
| \|Display\| | |

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



FIG. 13C

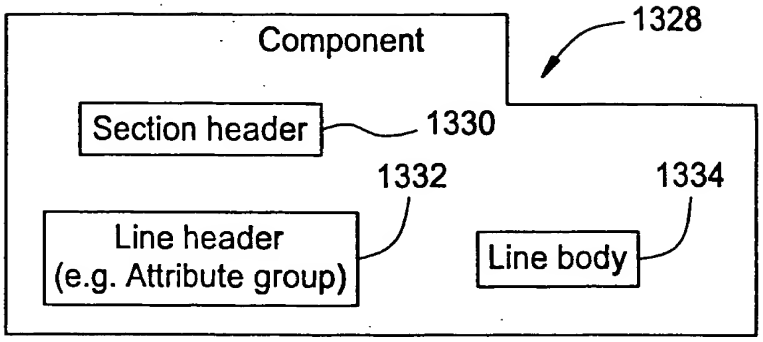


FIG. 13D

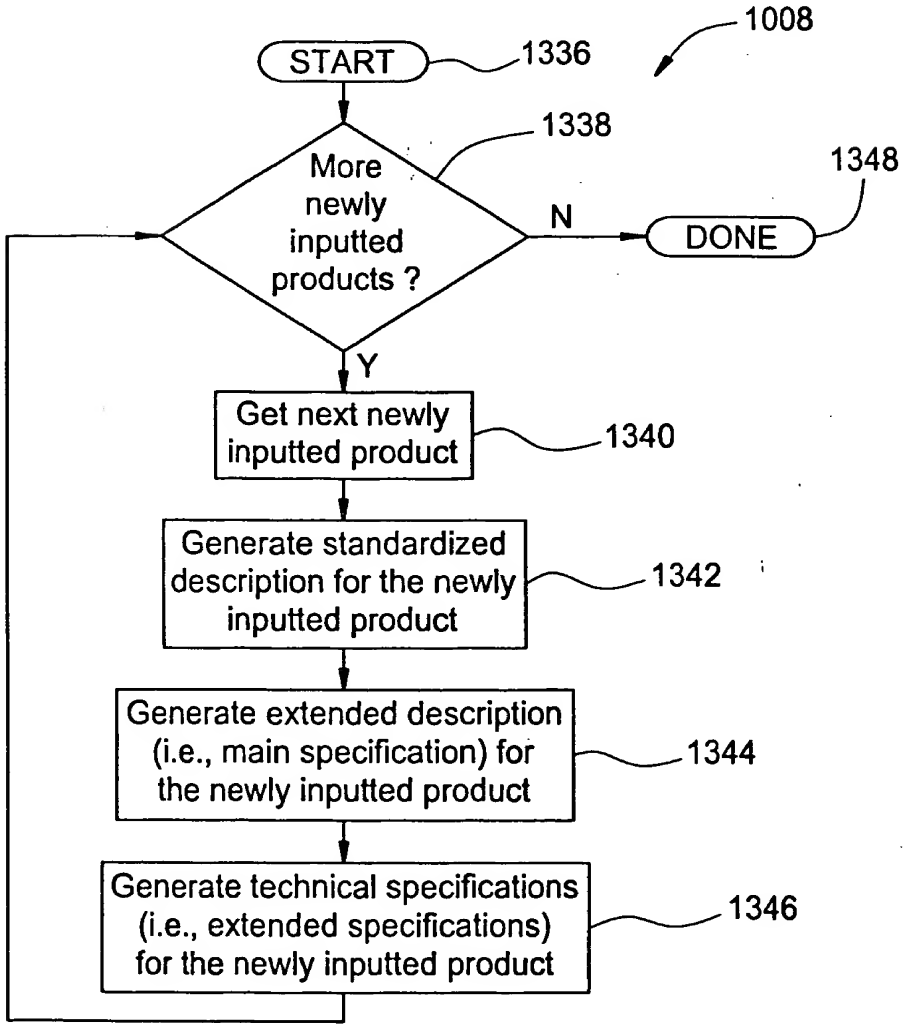

OIPE IAP14
DEC 22 2006
PATENT & TRADEMARK OFFICE



FIG. 13E

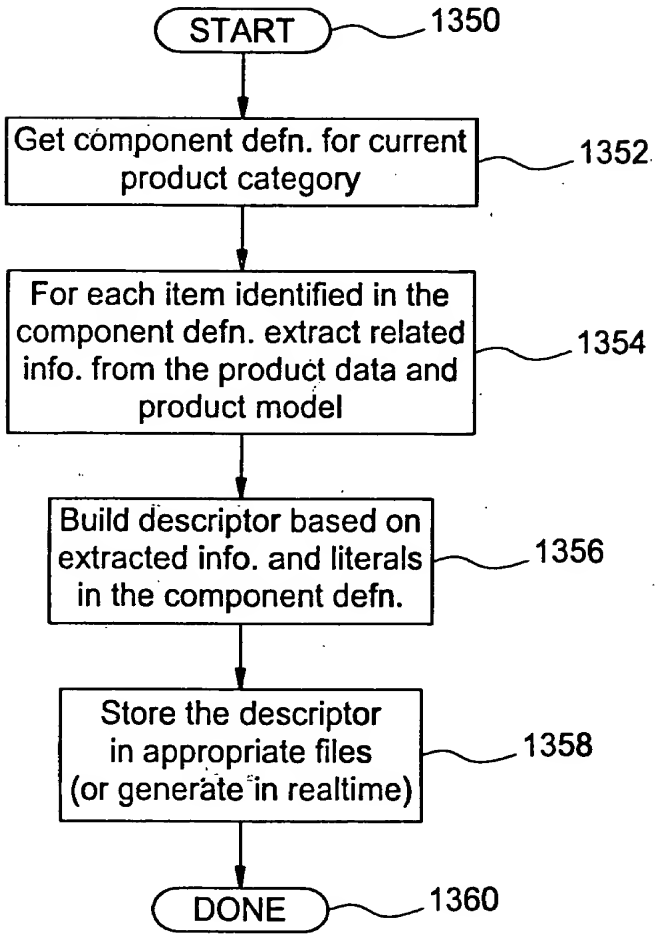

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



FIG. 14A

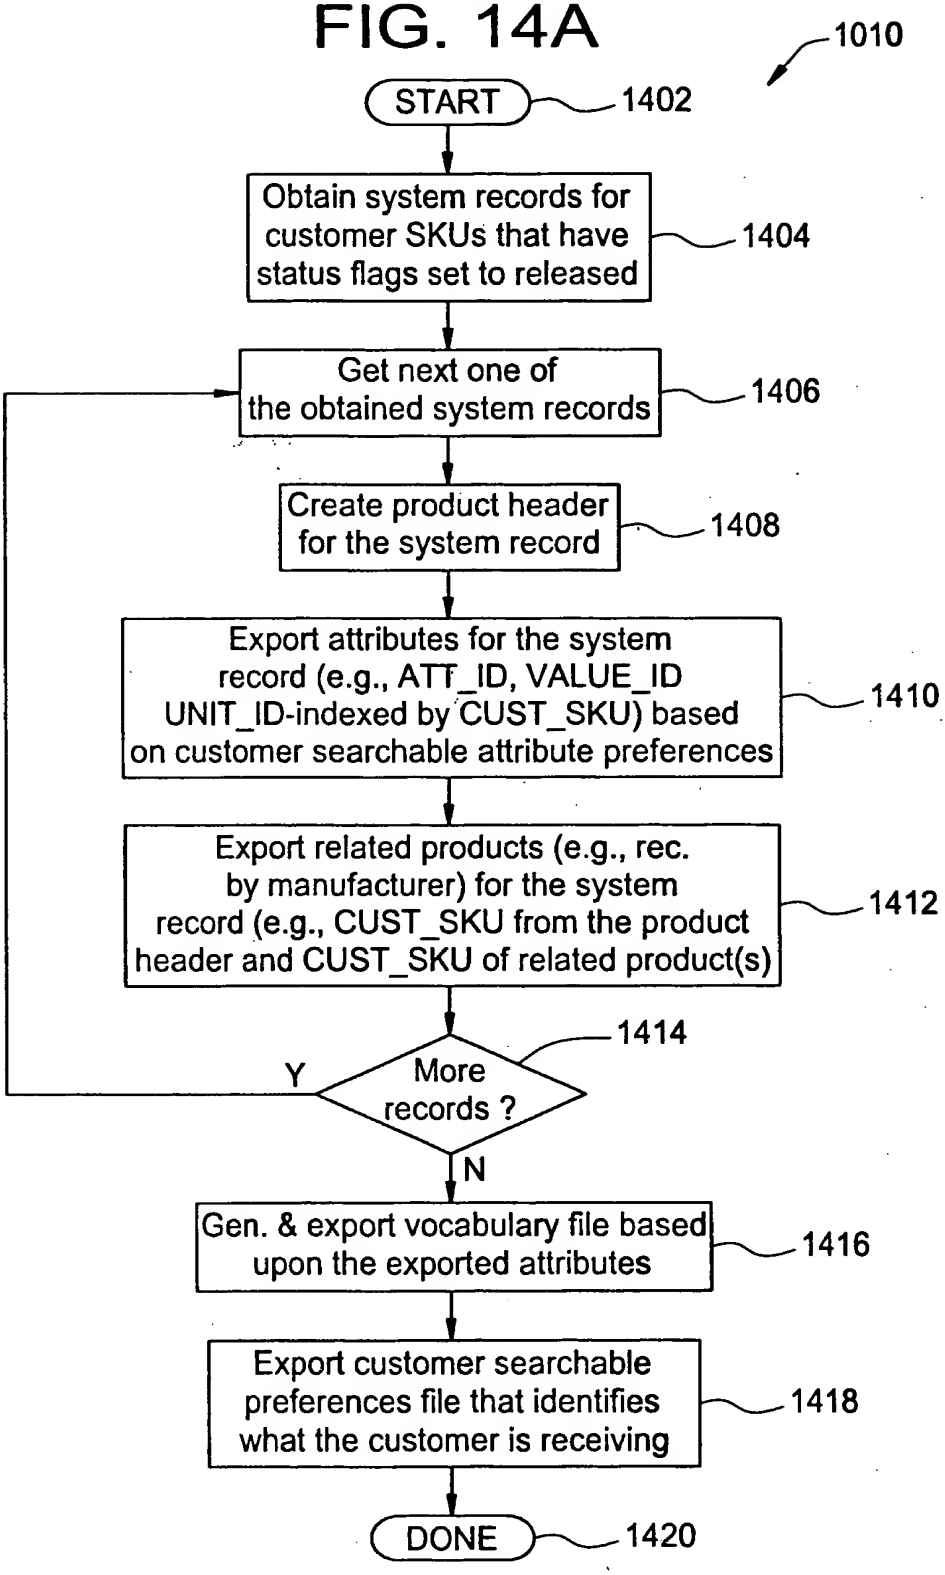

OIPE
DEC 22 2006
IAP44
PATENT & TRADEMARK OFFICE



FIG. 14B

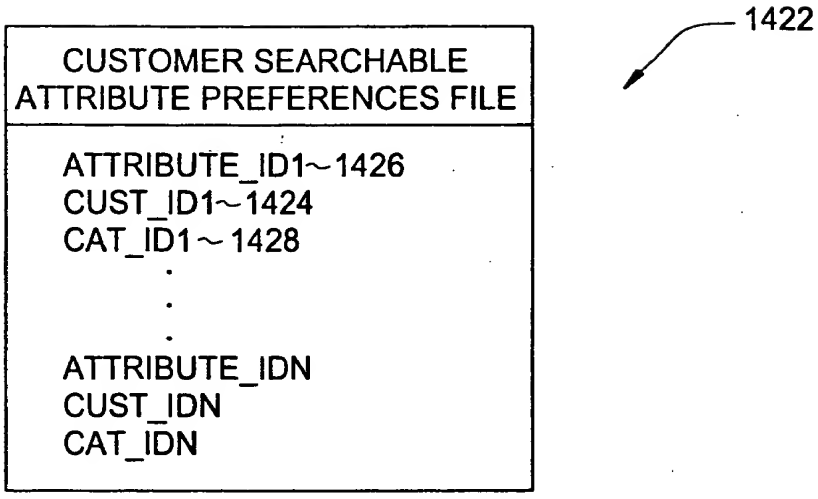

OIPE IAP44
DEC 22 2006
PATENT & TRADEMARK OFFICE



# FIG. 15A

Connection architecture

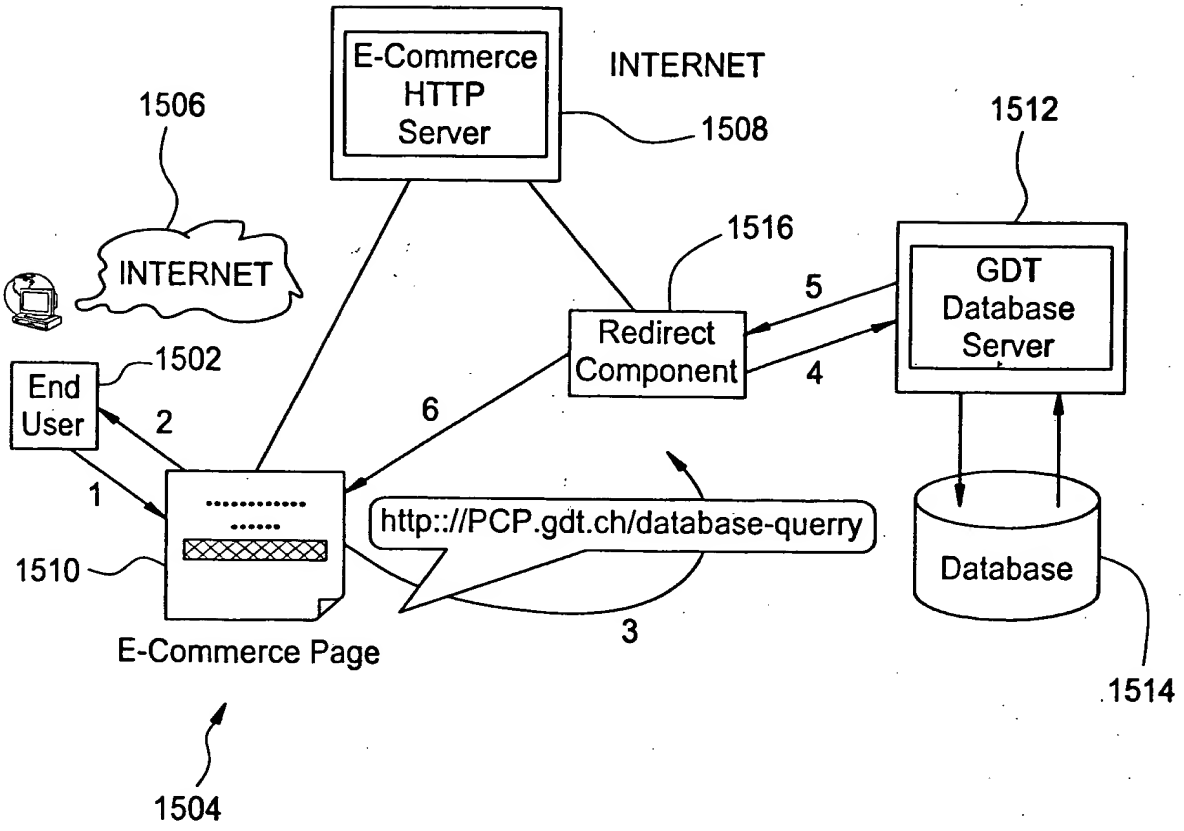


# FIG. 15B

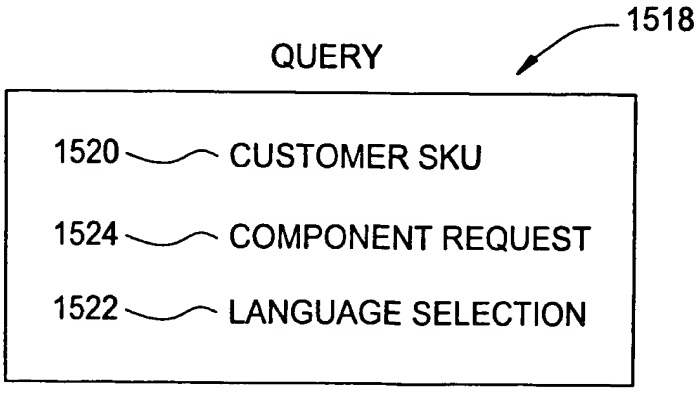

DEC 22 2006
PATENT & TRADEMARK OFFICE


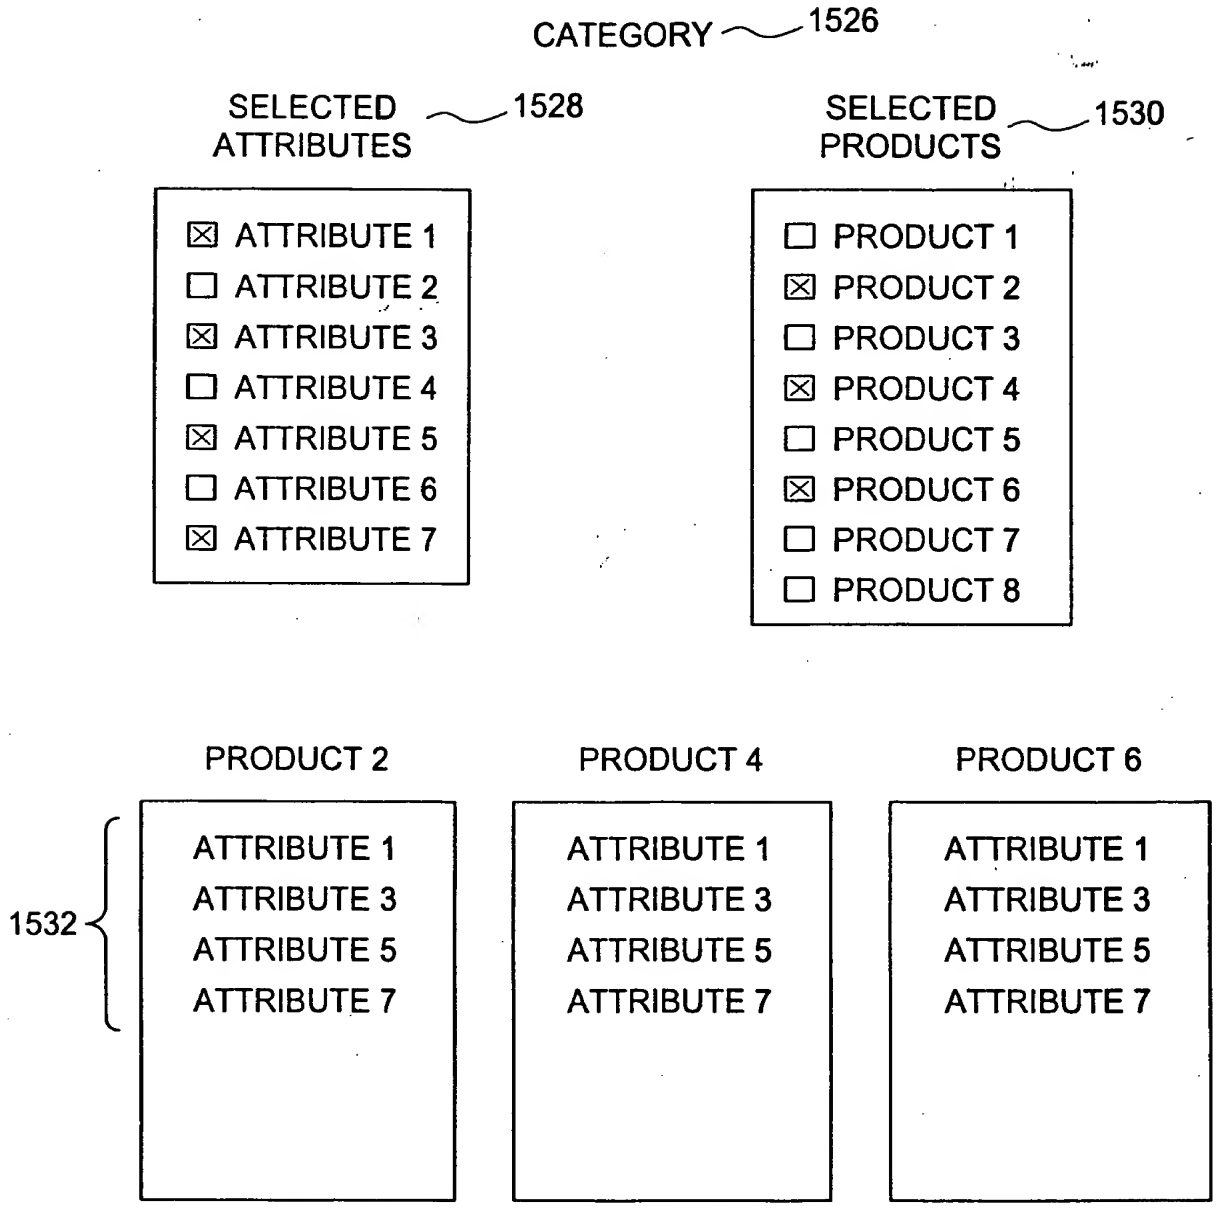
# FIG. 15C